


Replacing The Lock Batteries

1. Using the special Miwa "Y head" screwdriver remove the screw above the handle and at the bottom.
2. Note: see the screws highlighted
3. Once removed, pull the handle and the batteries will be exposed.

Use 4 AA alkaline batteries.


No not use batteries of different brands or mix any new and old batteries.



Ensure that the cable has been correctly connected.

Take care not to drop the outside escutcheon.

Incorrect use of batteries may cause leakage or rupture.

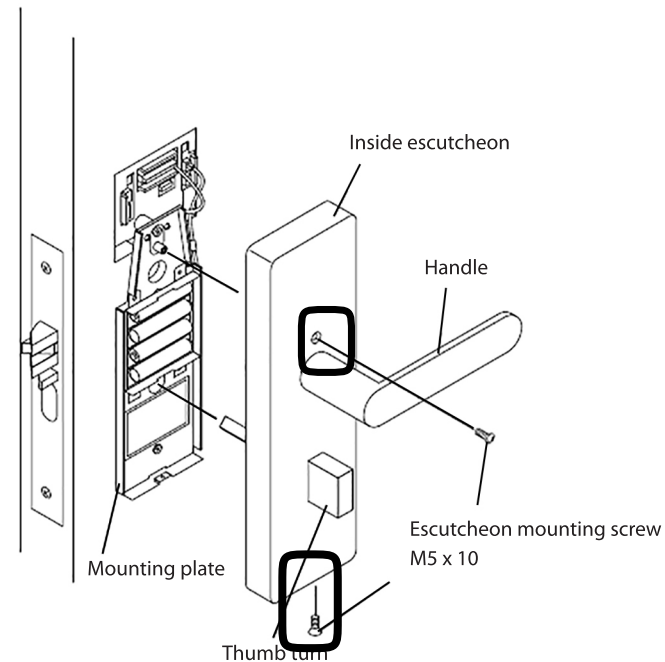

CAUTION

1. Ensure that all wires have been correctly connected.
2. Check that the batteries are correctly installed.
3. After the card lock is installed, never close the door until an operational check is completed.