

5451EIS Rate of Rise Temperature Detector



Features


- Sleek low profile design
- Low current draw
- Remote LED option
- Simple plug-in installation
- Compatible with standard B401 mounting base
- Built-in test switch
- Tamper-resistant
- Suitable for use in up to Zone 0
- Approved for use with Zener safety barriers or galvanic isolators
- BASEEFA approval to EEX ia IIB T5
- Complies with EN54 – 5:2000 (Amendment 1) Class A1R

Description

Model 5451EIS is an intrinsically safe rate of rise detector with fixed temperature alarm. It uses state-of-the-art dual thermistor technology to provide maximum sensitivity. This detector is designed to afford open area protection and is for use in hazardous areas where potentially explosive atmospheres are likely to arise (confirm classification of equipment required with your responsible authority). Model 5451EIS detectors are designed to be used with compatible panels only.

Each detector has two LEDs to provide a local visual indication of detector status. Once the detector senses a fire, it latches in alarm and remains in this condition until it is reset by a momentary power interruption.

Model 5451EIS rate of rise detectors include a tamper feature that prevents removal from their mounting base (if enabled) without the use of a tool. In addition, these detectors can be easily tested by activating an internal reed switch with a test magnet.

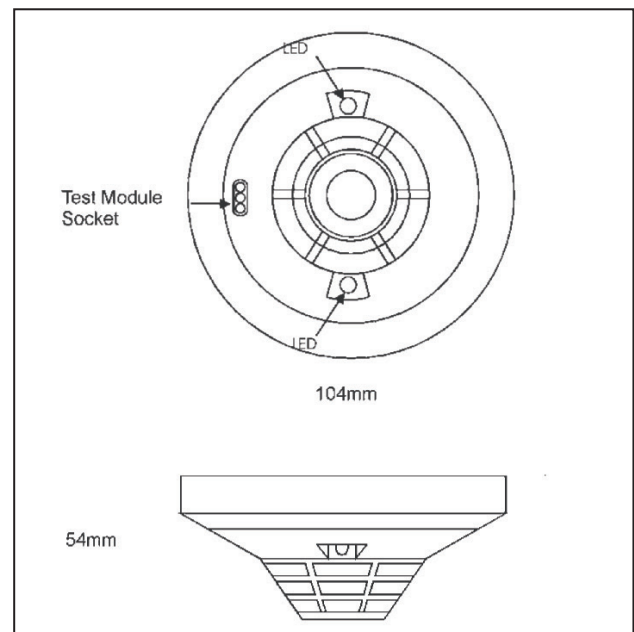


118a/04

Baseefa03ATEX0155X

G296050


5451EIS Intrinsically Safe Rate of Rise Temperature Detector

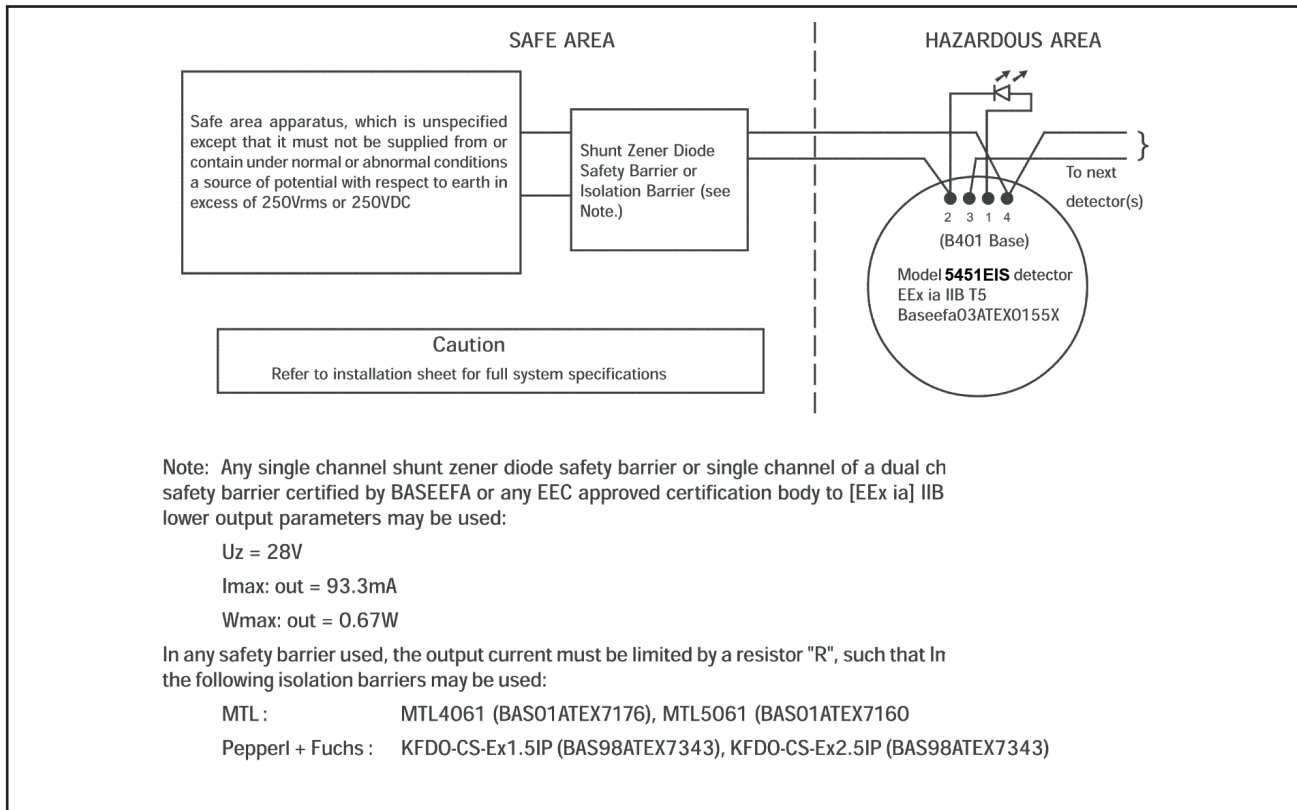

Electrical Specifications

Operating Voltage Range
15 to 32VDC Latching alarm reset by momentary power interruption
Typical Standby Current (maximum)
100µA at 24VDC

Environmental Specifications

Operating Temperature Range
-10°C to 55°C
Humidity
10% to 93% Relative Humidity(non-condensing)
Intrinsic Safety Rating
 II1G EEx ia IIB T5

Product Range

Compatible Bases
B401, B401DG

Mechanical Information

Height
54mm
Diameter
104mm
Weight
80g (excluding base)
Max Wire Gauge for Terminals
2.5 mm ²
Colour
Pantone Warm Grey 1C
Material
Bayblend FR110