




### Dimensions

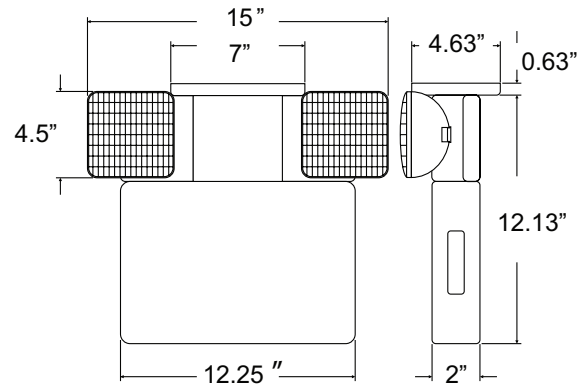

### Description

The Mircom MRPC-2 thermoplastic combination running man sign represents the fusion of traditional and modern design. The typical top mounted power-pack is combined with a bold, square style lamp head and all are designed from high impact thermoplastic. Supplied standard with long-life, high brightness LEDs the MRPC-2 series are also energy efficient with energy consumption as low as just 2.0w. Installation is quick and easy since each sign is designed and supplied with quick-snap faceplates, backplate and a universal mounting canopy. The two high output, square lamp heads are fully adjustable and are supplied complete with 9 watt lamps.

### Features

The MRPC-2 is a series of completely self-contained, combination emergency light and running man sign, made for use on 120 or 347 volt circuits. The MRPC-2 series are designed with high impact thermoplastic. A maintenance free, sealed lead acid battery is included with the unit that will provide 30 watts of emergency power for 30 minutes duration. A universal mounting pattern is stamped into the backplate for wall mounting directly to electrical junction boxes (not supplied). Available in white colour.

### Circuitry

The Mircom MRPC-2 combination unit comes complete with high quality, pulse action chargers which are up to 70% more efficient than constant voltage chargers. The solid state chargers are complete with low voltage disconnect, brownout, and short circuit protection. All models are standard 120VAC or 347VAC dual input, field selectable. A LED indicator is provided for AC-ON status display and all chargers are complete with a quick test, push-button switch for easy maintenance and testing. Recharge time is 24 hours.



*Comes standard with three pictogram legends for direction selection.*

**Approvals:**  
CSA Certified to C22.2 #141  
and C860



**CATALOG NUMBER 4121**

NOT TO BE USED FOR INSTALLATION PURPOSES.

Mircom reserves the right to make changes at any time without notice in prices, colours, materials, components, equipment, specifications and models and also to discontinue models.

## Ordering Guide



Series
MRPC-2

## Model Ratings

Model	Voltage	Wattage Capacities			
		30 min.	60 min.	90 min.	120 min.
MRPC-2	6V	30	15	12.5	7.5

NOT TO BE USED FOR INSTALLATION PURPOSES.



**Canada**  
25 Interchange Way  
Vaughan, Ontario L4K 5W3  
Telephone: (905) 660-4655  
Fax: (905) 660-4113

**U.S.A.**  
4575 Witmer Industrial Estates  
Niagara Falls, NY 14305  
Toll Free: (888) 660-4655  
Fax Toll Free: (888) 660-4113

Web page: <http://www.mircom.com> Email: [mail@mircom.com](mailto:mail@mircom.com)

Distributed by: