




Features

| | |
|-----------------------------------|--------------|
| Input Power on AC (when charging) | 3.5 - 4.5W |
| Output power on battery | 5W |
| Lamp Type | 2x2W SMD LED |
| Input Voltage | 120-347 VAC |
| Frequency | 50/60 Hz |
| LED Type | SMD strip |
| Battery Type | Ni-cd |
| Working Time | 120 Minutes |
| Charging Time | 24 Hours |

Description

- Injection-molded thermoplastic ABS housing
- CSA 22.2 Compliant
- Wall and side mounting
- Input power on AC is 1W when fully charged
- Input Voltage: 120-347 VAC 50/60Hz
- Super bright SMD LED 2x2W, 160 lumens each
- Nickel Cadmium 3.6Volt, 1800mAh Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes
- Conversion time: <0.2 second
- IP Class: IP20, suitable for damp locations
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F
- Two-sided sign with 3 pictogram inserts

Dimensions

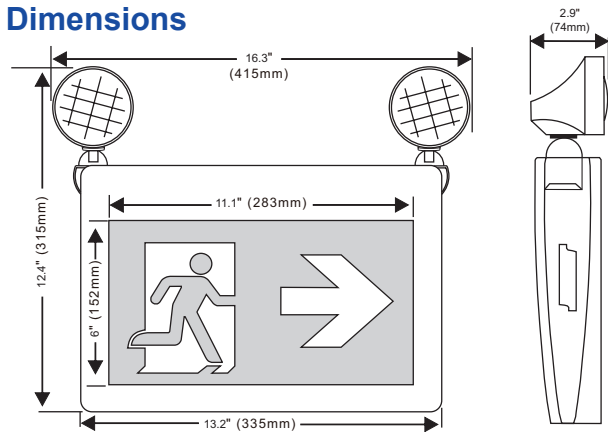

Dimensions are approximate and subject to change.



Unit comes standard with three pictogram legends for direction selection.



Ordering Information

| Model | Description |
|----------|-----------------------------------|
| ELRM-180 | LED Running Man Combo, 6 per case |



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4134**

Rev. 2