




Features

Input Power on AC (when charging)	3.5-7.5W
Output Power on battery	6W
Lamp Type	2x2W LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type (unit)	SMD LED Strip
Battery Type	Sealed Lead Acid
Working Time – CSA	30 Minutes at 36W
Working Time – cULus	90 Minutes at 12W
Charging Time	24 Hours

Description

- Durable 20 gauge steel housing
- CSA 22.2 and UL 924 Compliant
- Wall, ceiling, and side mountable
- 1-sided sign (2-sided available at additional charge)
- Input power on AC is 3.5W when fully charged
- Input Voltage: 120-347VAC, 50/60Hz
- Super bright LED heads, 160 lumens each
- 6V6Ah Sealed Lead Acid battery
- CSA Certified Backup time: 30 minutes at 36W
2W from sign, 4W from attached heads
+ up to additional 30W
- cULus Certified Backup time: 90 minutes at 12W
2W from sign, 4W from attached heads
+ up to additional 6W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Suitable for damp locations
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

Technical Drawing

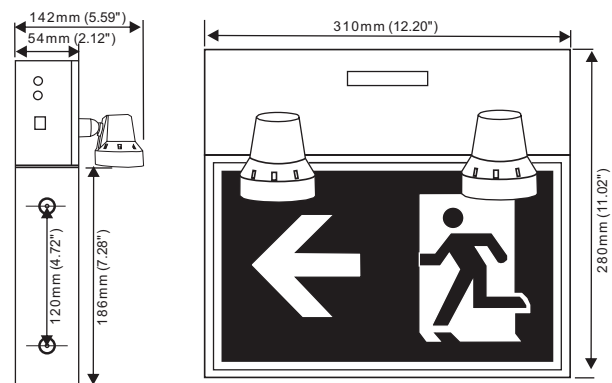

Remote Add-ons



EL-7030A (1.5W)
EL-7030A5 (5W)



EL-7030B (3W)
EL-7030B10 (10W)



EL-7030AWP (3W)



EL-7030BWP (6W)



Ordering Information

Model	Description
ELRM-180-18RCS	Steel LED Running Man Sign Combo Unit (Remote Capable), 5 per case