




**Features**

Input Power on AC (when charging)	6.5W
Output Power on Battery	3.5 W
Lamp Type	2x1W SMD LED
Input Voltage	120/347 VAC
Frequency	60 Hz
Battery Type	NI-MH
Working Time	120 Minutes
Charging Time	15-24 Hours

**Description**

- Injection-molded thermoplastic ABS housing
- UL-924 Flame rating compliant
- 2-Sided sign
- Wall, side and ceiling mountable
- Input Power on AC is 1.5W when fully charged
- Input Voltage: 120/347 VAC, 60Hz
- Super bright LED light heads. 71 lumens each
- 2 Nickel Metal Hydride Batteries 3.6V 1200mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes including 3W remote capability
- Conversion time: <0.2 second
- IP Class: IP20
- Max install height: 5.1m (16.7 ft)
- Operating Temperature: 0 °C ~ 40 °C / 32 °F ~104 °F

**Technical Drawing**

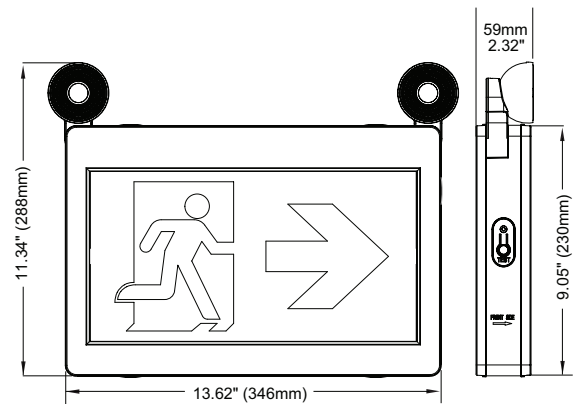

**Remote Add-ons**



EL-7030A (1.5W)



EL-7030B (3W)

**Included Pictograms**



With Arrow 2 pcs



Without Arrow 1 pc



**Ordering Information**

Model	Description
ELRM-180-2RC	LED Running Man Sign Combo Unit (3W, Remote Capable), 6 per case

**Canada**

25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

**U.S.A.**

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.