




Features

Input Power on AC	3-4W
Output Power on Battery	1W
Lamp Type	LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type	LED Strip
Battery Type	Ni-cd
Working Time	180 Minutes
Charging Time	24 Hours

Description

- Durable 20 gauge steel housing
- UL 924 Compliant
- 2-sided sign
- Wall, ceiling, and side mountable
- Input Voltage: 120 - 347VAC 50/60Hz
- LED technology
- 3.6V 1000mAh Nickel Cadmium battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 180 minutes
- Suitable for damp locations
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

Technical Drawing

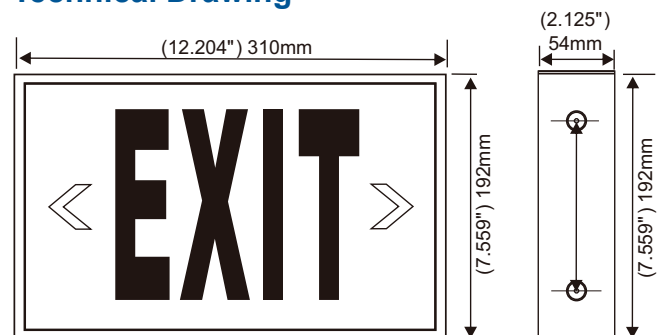

Included Inserts

- Second EXIT insert cover for 2-sided ceiling mounting
- Removable chevrons



Ordering Information

Model	Description
EL-100SR	Steel LED Exit Sign, 6 per case



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4141**

Rev. 2