




Features

Power on AC	3-4W
Output Power on Battery	1W
Input Voltage	120-347 VAC
Frequency	50/60Hz
LED Type	Plug-in LED Strip
Battery Type	Ni-cd
Working Time	180 Minutes
Charging Time	24 Hours

Description

- Aluminum housing with high grade PMMA acrylic panel
- 1-sided sign, double face available (on request)
- Wall or ceiling mountable
- Input Voltage: 120-347 VAC, 50/60Hz
- Super bright LED Strip
- Nickel Cadmium Battery 3.6V 1000mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 180 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Operating Temperature: 41 °F ~ 86 °F (5 °C ~ 30 °C)
- UL and New York City Approved
- 8" high letters with 1" stroke
- 100ft viewing distance
- Meets UL924 standards

Technical Drawing

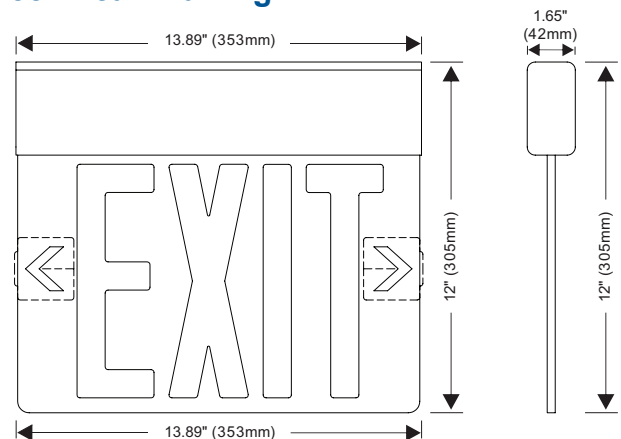

NEW YORK CITY
APPROVED



Ordering Information

Model	Description
EL-7008RA--NYC	Aluminum Edge-Lit LED Exit Sign – New York City Approved

Canada

25 Interchange Way Vaughan, ON L4K 5W3
Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4147**

Rev. 0