




Features

Input Power on AC	4.5/6W
Output Power on Battery	4W
Lamp Type	1W LED (X3)
Input Voltage	120/277 VAC
Frequency	50/60 Hz
LED Type	Plug-in LED Strip
Battery Type	Ni-cd
Working Time	90 Minutes
Charging Time	24 Hours

Description

- 20 gauge steel housing in white finish
- Input Voltage: 120/277VAC, 50/60Hz
- 1-Sided sign
- Side or wall mountable
- Nickel Cadmium Battery 3.6V 2000mAh
- Super bright LED Strip
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 90 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Three LED heads (adjustable & removable), 70 lumens each
- Operating Temperature: 41 °F ~ 95 °F (5 °C ~ 35 °C)
- UL and New York City Approved
- 8" high letters with 1" stroke
- 100ft viewing distance
- Meets UL924 standards
- Removable chevrons

Technical Drawing

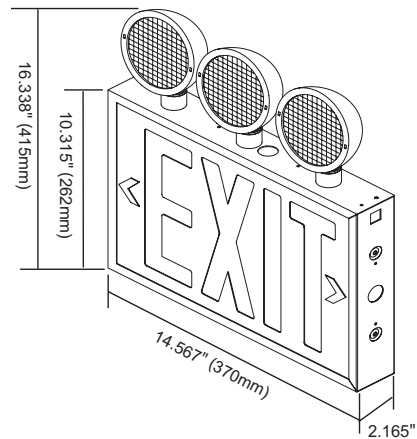

Ordering Information

Model	Description
EL-7027BR-NYC	LED Emergency Exit Sign Combo with Adjustable Heads - New York City Approved

**NEW YORK CITY
APPROVED**



Canada

25 Interchange Way Vaughan, ON L4K 5W3
Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.