




Features

Power on AC	14-16W
Lamp Type	2x2W LED
Input Voltage	120/347 VAC
Frequency	50/60Hz
Battery Type	Sealed Lead Acid
Working Time	30 Minutes at 95W
Charging Time	24 Hours

Description

- Durable 20 gauge steel housing
- CSA 22.2 Compliant
- Wall mountable
- Input Voltage: 120/347VAC 50/60Hz
- LED technology
- 12V10Ah Sealed Lead Acid Battery
- Backup time: 30 minutes at 95W
- 4W from attached heads + up to additional 91W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Suitable for damp locations
- Optional line cord included
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

Technical Drawing

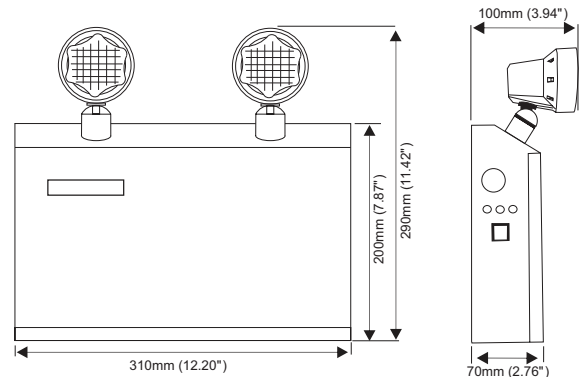

Remote Add-ons



EL-7030A (1.5W)
EL-7030A5 (5W)



EL-7030B (3W)
EL-7030B10 (10W)



EL-7030AWP (3W)



EL-7030BWP (6W)



Ordering Information

Model	Description
EL-7062S	Emergency Battery Backup Unit (95W, Remote Capable), 5 per case