




**Features**

Input Power on AC	4.5W
Output Power on Battery	1W
Lamp Type	SMD LED strip
Input Voltage	120-347 VAC
Frequency	50/60 Hz
Battery Type	NI-MH
Working Time	120 Minutes
Charging Time	24 Hours

**Description**

- Injection-molded thermoplastic ABS housing
- UL 924 Compliant
- 2-sided sign
- Wall, side and ceiling mountable
- Input Voltage: 120 - 347VAC, 50/60Hz
- LED technology
- Nickel Metal Hydride Battery 3.6V 1500mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 120 minutes
- Manufactured with extra seals and gaskets
- Suitable for wet locations
- Operating Temperature: -20 °C ~ 40 °C / -4 °F ~ 104 °F

**Technical Drawing**

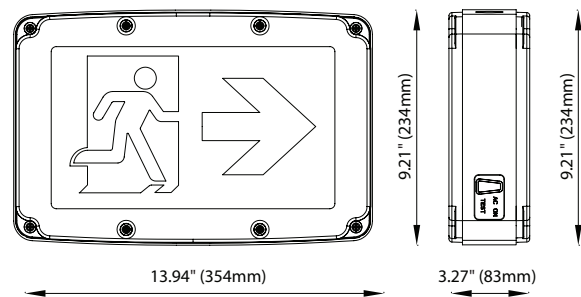

**Included Pictograms**



With Arrow 2 pcs



Without Arrow 1 pc

**Ordering Information**

Model	Description
ELRM-100WP	Compact LED Wet Location Running Man Sign, 5 per case

