




Features

Input Power on AC	5W
Output Power on Battery	1W
Input Voltage	120-347 VAC
Frequency	50/60Hz
LED Type	SMD Strip
Battery Type	Ni-cd
Working Time	180 Minutes
Charging Time	24 hours

Description

- Fire-retardant thermoplastic casing with transparent polycarbonate diffuser
- Wall or ceiling mountable
- Operates in Maintained or non-Maintained modes
- Input Voltage: 120-347 VAC, 50/60Hz
- Nickel Cadmium Battery: 3.6V SC1500mAh
- Ultra bright 150 Lumen SMD LED light source
- Test switch and charge indicator light
- Overcharge and over-discharge protection
- Backup time: 180 Minutes
- Conversion time: <0.2 second
- IP class: IP20
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

Technical Drawing

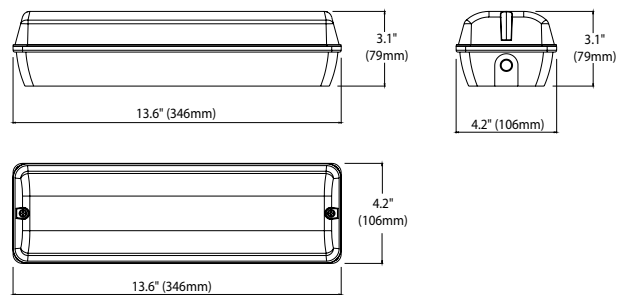

Ordering Information

Model	Description
EL-UL236	Emergency Light with Battery Backup (maintained or non-maintained)



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4161**

Rev. 0