




Features

Input Power on AC	4.5W
Output Power on Battery	1W
Lamp Type	SMD LED strip
Input Voltage	120-347 VAC
Frequency	50/60 Hz
Battery Type	NI-MH
Working Time	120 Minutes
Charging Time	24 Hours

Description

- Injection-molded thermoplastic ABS housing
- UL 924 Compliant
- 2-sided sign
- Wall, side and ceiling mountable
- Input Voltage: 120 - 347VAC, 50/60Hz
- LED technology
- Nickel Metal Hydride Battery 3.6V 1500mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: 120 minutes
- Manufactured with extra seals and gaskets
- Suitable for wet locations
- Operating Temperature: -20 °C ~ 40 °C / -4 °F ~ 104 °F

Technical Drawing

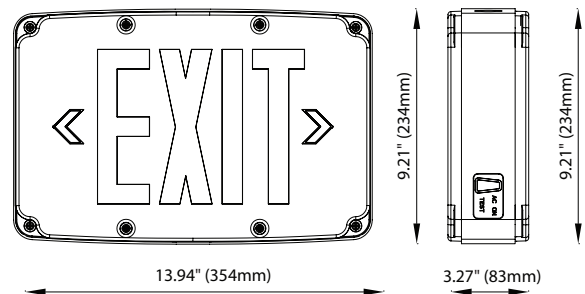

Ordering Information

Model	Description
EL-100WP	Compact LED Wet Location EXIT Sign, 5 per case



Canada
 25 Interchange Way Vaughan, ON L4K 5W3
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates Niagara Falls, NY 14305
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4162**

Rev. 1