




### Description

- Durable 20 gauge steel housing
- Wall, ceiling, and side mountable
- 1-sided sign (2-sided available)
- Input power on AC is 3.5W when fully charged
- Input Voltage: 120-347VAC, 50/60Hz
- Super bright LED heads, 160 lumens each
- 6V6Ah Sealed Lead Acid battery
- CSA Certified Backup time: 30 minutes at 36W  
2W from sign, 4W from attached heads  
+ up to additional 30W
- cULus Certified Backup time: 90 minutes at 12W  
2W from sign, 4W from attached heads  
+ up to additional 6W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Suitable for damp locations
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

### Features

Input Power on AC (when charging)	3.5-7.5W
Output Power on battery	6W
Lamp Type	2x2W LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type (unit)	SMD LED Strip
Battery Type	Sealed Lead Acid
Working Time – CSA	30 Minutes at 36W
Working Time – cULus	90 Minutes at 12W
Charging Time	24 Hours

### Technical Drawing

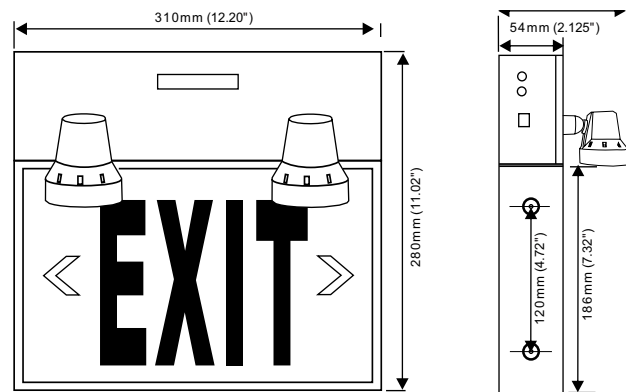

### Remote Add-ons



EL-7030A (1.5W)



EL-7030B (3W)



### Ordering Information

Model	Description
EL-180-18RCS	Steel LED Emergency Exit Sign Combo (Remote Capable)

#### Canada

25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

#### U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.