




## Features

Input Power on AC (when charging)	3-4W
Input Power on AC (when fully charged)	1W
Output Power on battery	5W
Lamp Type	2x2W LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type	SMD LED
Battery Type	Ni-cd
Working Time	120 Minutes
Charging Time	15-24 Hours

## Description

- Injection-molded thermoplastic ABS housing
- UL -924 Compliant
- 1-sided sign (2-sided available at additional charge)
- Wall and ceiling mountable
- Input Voltage: 120-347VAC, 50/60Hz
- 2x2 W lamps for emergency mode, 160 lumens each
- Nickel Cadmium Battery, 3.6V 1800mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Insulation: II, Range: 80m2/860 sq. ft.
- Operating Temperature: 0 °C ~ 40 °C / 32°F ~ 104°F
- Removable chevrons

## Technical Drawing

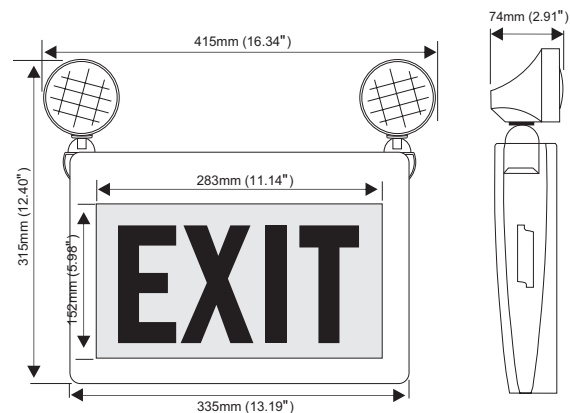

## Ordering Information

Model	Description
EL-7027BR	LED Emergency Exit Sign Combo With Adjustable Heads, 6 per case



### Canada

25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

### U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.

CATALOG NUMBER **4143**

Rev. 1