




## Features

Input Power on AC (when charging)	3-4W
Input Power on AC (when fully charged)	1W
Output Power on battery	5W
Lamp Type	2x2W LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type	SMD LED
Battery Type	Ni-cd
Working Time	120 Minutes
Charging Time	15-24 Hours

## Description

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- 1-sided sign
- Wall and ceiling mountable
- Input Voltage: 120-347VAC, 50/60Hz
- 2x2 W lamps for emergency mode, 160 lumens each
- Nickel Cadmium Battery, 3.6V 1800mAh
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Insulation: II, Range: 80m2/860 sq. ft.
- Operating Temperature: 0 °C ~ 40 °C / 32°F ~ 104°F
- Removable chevrons

## Technical Drawing

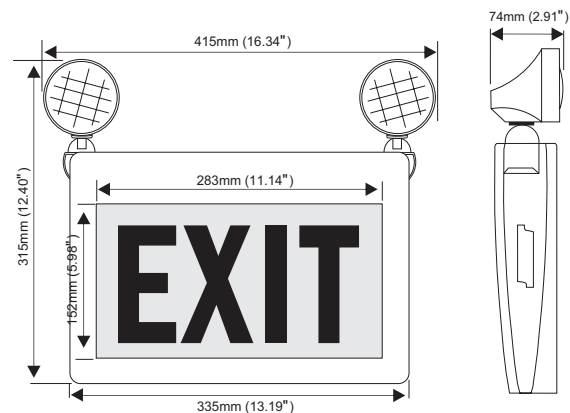

## Ordering Information

Model	Description
EL-7027BR	LED Emergency Exit Sign Combo With Adjustable Heads



### Canada

25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

### U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.