




**Features**

Power on AC	15W - 28W
Lamp Type	2x10W LED
Input Voltage	120/347VAC
Frequency	50/60Hz
Battery Type	Sealed Lead Acid
Working Time	30 Minutes at 720W
Charging Time	60 Hours

**Description**

- Durable 18 gauge steel housing
- Wall mountable
- Input Voltage: 120/347VAC, 50/60Hz
- 2 x 10W Super bright LED light heads, 900 lumens each
- Two 12V35Ah sealed lead acid batteries
- Backup time on battery: 30 minutes at 720W  
Total calculated wattage at 90 minutes: 360W  
Total calculated wattage at 120 minutes: 220W
- Test switch and charge indicator light
- Overcharge & over-discharge protection
- Suitable for damp locations
- Optional 120V line cord included
- Operating temperature: 15 °C ~ 40 °C / 59 °F ~ 104 °F

**Technical Drawing**

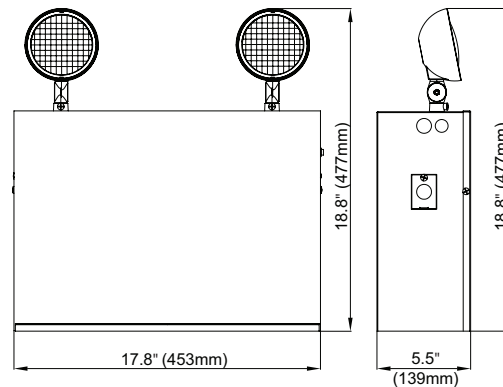

**Remote Add-ons**

Unit comes with two attached 10W remote light heads. You can add on up to 700W of additional remotes comprised of any or a combination of the following:



EL-7030A (1.5W)



EL-7030B (3W)



EL-7030AWP (3W)



EL-7030BWP (6W)



**Ordering Information**

Model	Description
EL-7066S	Emergency LED Battery Backup Unit - Steel (720W Remote Capable), packed 1/case



**Canada**  
25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

**U.S.A.**  
4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

**CATALOG NUMBER 4144**

Rev. 0