




**Features**

Power on AC	14-16W
Lamp Type	2x2W LED
Input Voltage	120/347 VAC
Frequency	50/60Hz
Battery Type	Sealed Lead Acid
Working Time	30 Minutes at 95W
Charging Time	24 Hours

**Description**

- Durable 20 gauge steel housing
- Wall mountable
- Input Voltage: 120/347VAC 50/60Hz
- LED technology
- 12V10Ah Sealed Lead Acid Battery
- Backup time: 30 minutes at 95W
- 4W from attached heads + up to additional 91W
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Suitable for damp locations
- Optional line cord included
- Operating Temperature: 5 °C ~ 30 °C / 41 °F ~ 86 °F

**Technical Drawing**

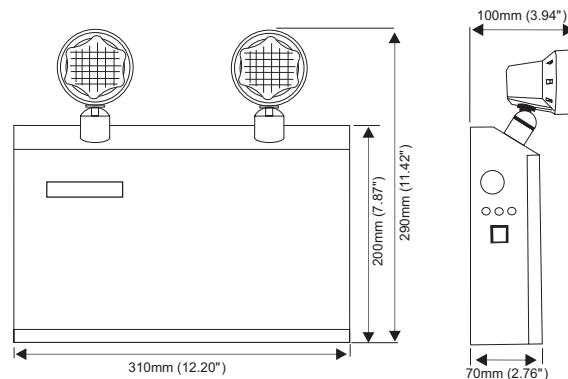

**Remote Add-ons**



EL-7030A (1.5W)



EL-7030B (3W)



**Ordering Information**

Model	Description
EL-7062S	Emergency Battery Backup Unit (95W, Remote Capable)

**Canada**

25 Interchange Way Vaughan, ON L4K 5W3  
 Telephone: (905) 660-4655 | Fax: (905) 660-4113

**U.S.A.**

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
 Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.