



BBX-FXMNS
White



BBX-FXMNSR
Red

Description

The BBX-FXMNS mass notification enclosure is designed for Integrated Fire and Audio consisting of a backbox, a two part door, a display and deadfront (inner door). Fire emergency detection and evacuation are critical to life safety and the Flex-Net Mass Notification enclosure is ideally suited for these applications.

Mircom's Flex-Net system is suited for all applications as it features a modular design for all project requirements

Features

- Can be used as a Mass Notification Enclosure, or for Commercial Fire Alarm Command Center Enclosure as well as a remote Node Enclosure on a Network Configuration,
- Comes standard with 2 Cat-30 Keys/Locks or a Thumb Twist Lock can be ordered for the upper door for Mass Notification use
- Can accommodate all the FleXNet™ Fire Alarm and modular audio models
- Backbox is black with either white doors (BBX-FXMNS) or red doors (BBX-FXMNSR)
- The BBX-FXMNS accommodates a RAXN-LCD Annunciator which is designated an ACU (Autonomous Control Unit) and a Master Microphone to provide emergency audio
- The BBX-FXMNS backbox is used for the mass notification node. It can be populated with 2 paging modules, 9 adder modules and 7 display modules. It also supports the addition of 4 audio amplifiers along with audio and telephone networking cards.
- The outer dimensions of the BBX-FXMNS fit within 63.5" X 22.5" X 9.5"
- Below this is a display LCD the DSPL-420-16TZDS, DSPL-420 or DSPL-2440 which may be used for service; this display will show all messages. All displays are optional and can be arranged in any order.
- Up to seven FX-LOC(R)s can be connected to any MNS node
- The FX-LOC(R) Local Operating Console along with the FleX-Net™ Network Fire Alarm provides compliance with the Mass Notification System (MNS) UL 2572 requirements
- Applicable Standards: UL 2572, UL 864, NFPA 72, ULC



S7010
864
2572



S7010



7165-1477:111



NYC
Fire Dept.
COA# 6064


NFPA
72

CATALOG NUMBER 5947


NOT TO BE USED FOR INSTALLATION PURPOSES.

Mircom reserves the right to make changes at any time without notice in prices, colours, materials, components, equipment, specifications and models and also to discontinue models.

Expanded View of the BBX-FXMNS Enclosure

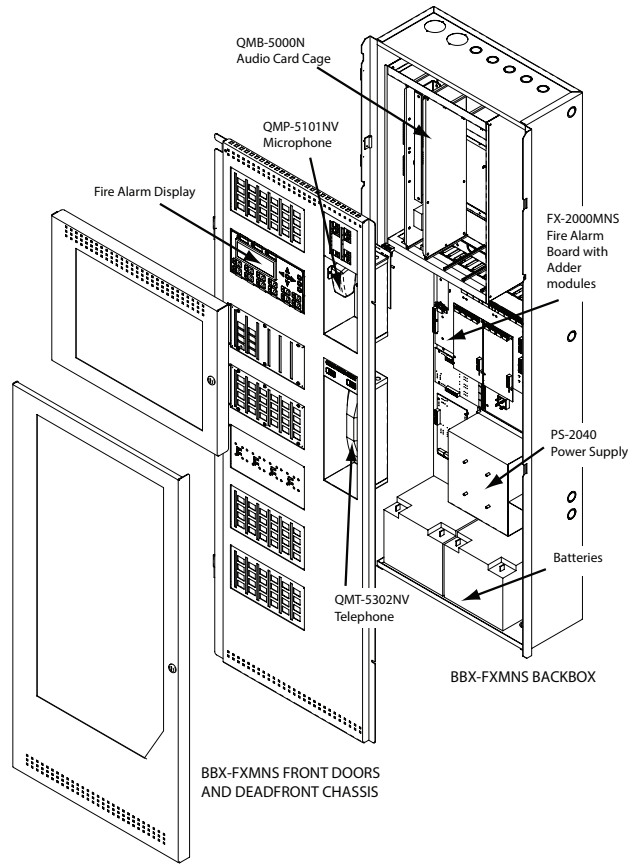

BBX-FXMNS Enclosure with Dimensions

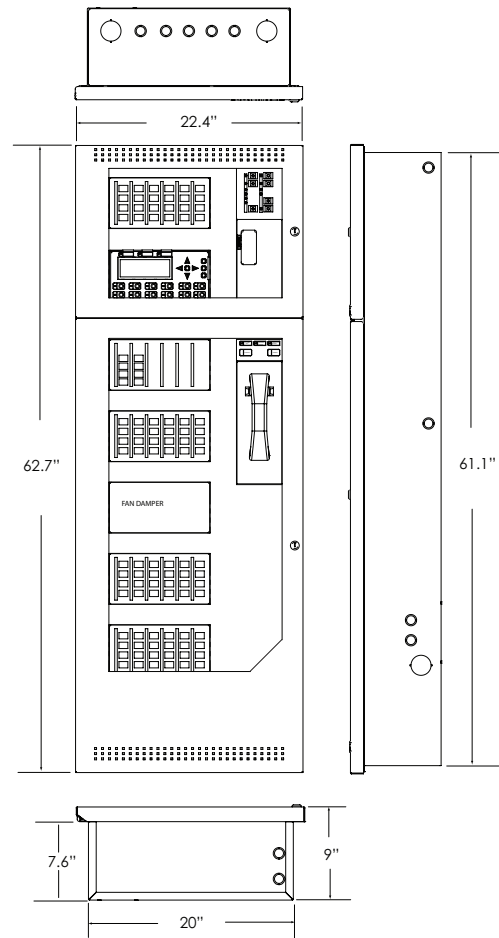

Ordering Information

Model	Description
BBX-FXMNS	Black backbox enclosure with white doors (61.5" H x 22" W x 9" D)
BBX-FXMNSR	Black backbox enclosure with red doors (61.5" H x 22" W x 9" D)

NOT TO BE USED FOR INSTALLATION PURPOSES.



Canada
 25 Interchange Way
 Vaughan, Ontario L4K 5W3
 Telephone: (905) 660-4655
 Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates
 Niagara Falls, NY 14305
 Toll Free: (888) 660-4655
 Fax Toll Free: (888) 660-4113

Web page: <http://www.mircom.com> Email: mail@mircom.com

Distributed by:

ISO 9001:2008
 REGISTERED



CAT. 5947
 Rev 0