


 BBX-FXMNS
White

 BBX-FXMNSR
Red

Description

The BBX-FXMNS mass notification enclosure is designed for Integrated Fire and Audio consisting of a backbox, a two part door, a display and deadfront (inner door). Fire emergency detection and evacuation are critical to life safety and the Flex-Net Mass Notification enclosure is ideally suited for these applications.

Mircom's Flex-Net system is suited for all applications as it features a modular design for all project requirements

Features

- Can be used as a Mass Notification Enclosure, or for Commercial Fire Alarm Command Center Enclosure as well as a remote Node Enclosure on a Network Configuration,
- Comes standard with 2 Cat-30 Keys/Locks or a Thumb Twist Lock can be ordered for the upper door for Mass Notification use
- Can accommodate all the FleXNet™ Fire Alarm and modular audio models
- Backbox is black with either white doors (BBX-FXMNS) or red doors (BBX-FXMNSR)
- The BBX-FXMNS accommodates a RAXN-LCD Annunciator which is designated an ACU (Autonomous Control Unit) and a Master Microphone to provide emergency audio
- The BBX-FXMNS backbox is used for the mass notification node. It can be populated with 2 paging modules, 9 adder modules and 7 display modules. It also supports the addition of 4 audio amplifiers along with audio and telephone networking cards.
- The outer dimensions of the BBX-FXMNS fit within 63.5" X 22.5" X 9.5"
- Below this is a display LCD the DSPL-420-16TZDS, DSPL-420 or DSPL-2440 which may be used for service; this display will show all messages. All displays are optional and can be arranged in any order.
- Up to seven FX-LOC(R)s can be connected to any MNS node
- The FX-LOC(R) Local Operating Console along with the FleX-Net™ Network Fire Alarm provides compliance with the Mass Notification System (MNS) UL 2572 requirements
- Applicable Standards: UL 2572, UL 864, NFPA 72, ULC


 S7010
864
2572


S7010

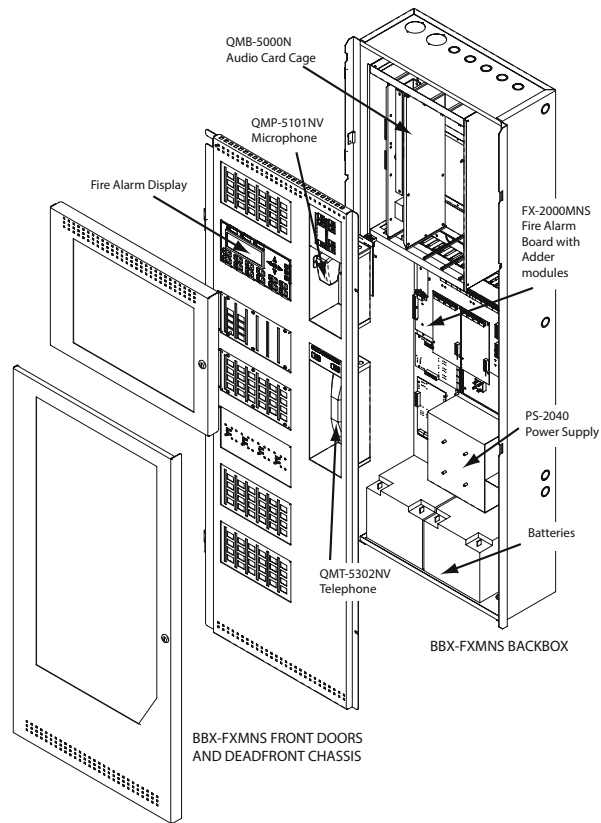


7165-1477:111

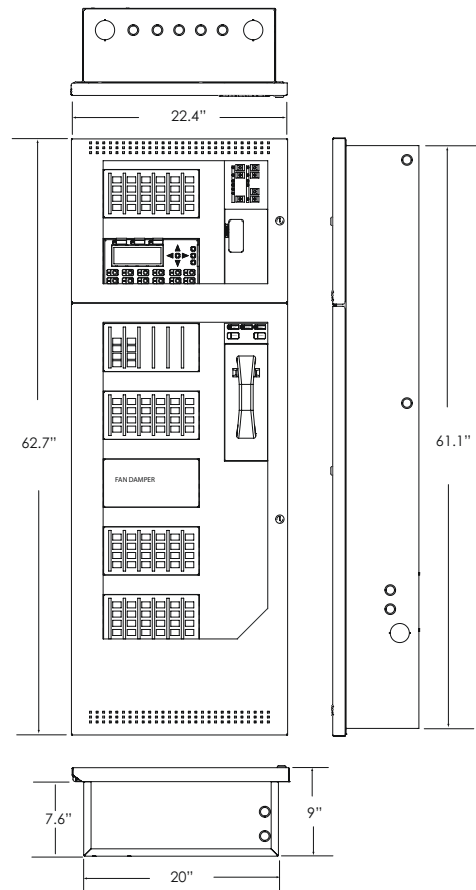

 NYC
Fire Dept.
COA# 6064

NFPA
72

Expanded View of the BBX-FXMNS Enclosure



BBX-FXMNS Enclosure with Dimensions



Ordering Information

Model	Description
BBX-FXMNS	Black backbox enclosure with white doors (61.5" H x 22" W x 9" D)
BBX-FXMNSR	Black backbox enclosure with red doors (61.5" H x 22" W x 9" D)

NOT TO BE USED FOR INSTALLATION PURPOSES.



Canada
 25 Interchange Way
 Vaughan, Ontario L4K 5W3
 Telephone: (905) 660-4655
 Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates
 Niagara Falls, NY 14305
 Toll Free: (888) 660-4655
 Fax Toll Free: (888) 660-4113

Web page: <http://www.mircom.com> Email: mail@mircom.com

Distributed by:

ISO 9001:2008
 REGISTERED



CAT. 5947
 Rev. 0