



TX3 Series

Description

Mircom Transmitters combine both long range technologies and operation:


- Transmitters are available in either a two- or four-button configuration, each corresponding to its own Wiegand receiver. The TX3-WRR-44 works with the four button and the TX3-WRR-22 for the two button transmitters.
- Transmitters ship standard with a proximity module compatible with Pyramid readers and others.
- Potted proximity or contactless smartcard module enables the transmitter to be used as a close-range, presentation style access credential
- Wiegand output works with all standard access control and identical data is outputted upon button press or presentation
- Presentation: 125-kHz proximity provides up to 2 inches (51mm) of read range
- Button press: 433-MHz operation features up to 100 feet (30.48m) of read range

Features/Benefits

- Mircom’s wireless communications are based upon a secure, digital, anti-playback routine, and rolling code, which reduces the risk of code sniffing and unauthorized duplication
- A robust weatherized design features hard plastic buttons, a reliable lithium battery and potted modules
- Transmitters include an integrated red LED, used to indicate both positive button press and battery strength
- Transmitter times-out* automatically when button is held down continuously to prevent battery drain and potential interference with other transmitters. Transmitter will turn on again only after the button is released and depressed again
- To enroll, simply double click the Transmitter when in range of the Receiver - no DIP switches required
- Compact design allows the Transmitters to be carried on a key chain, worn on a lanyard, or adhered to a flat surface, such as vehicle’s dashboard using Velcro®, for convenient gate access The two piece unit makes it simple to replace the battery and snap it back together
- Receiver has two channels which enables two overhead doors or gates to be controlled from one receiver
- Weather Resistant Receiver housing enables the receiver to be mounted outdoors

433-MHz Long Range ID Solution

Modes of Operation

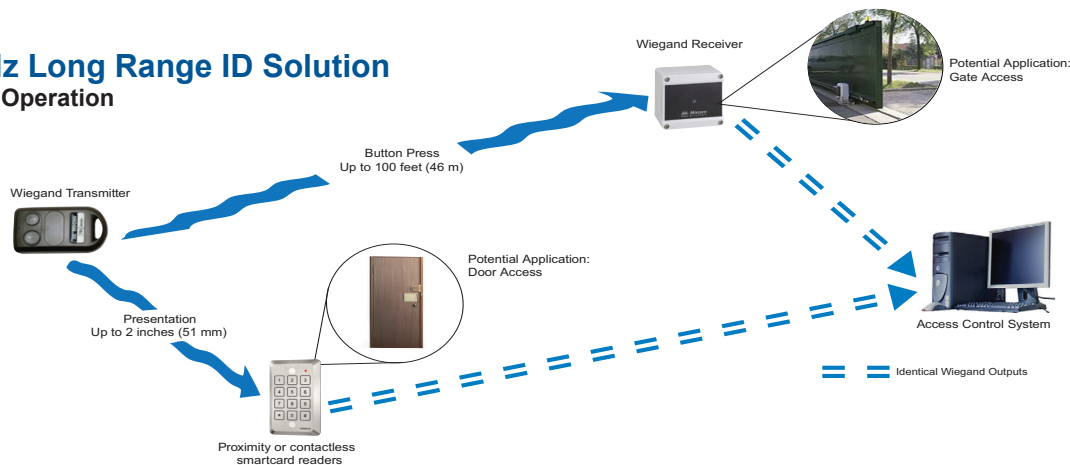

Specifications

Details	
Dimensions:	Transmitter 1.45" W × 2.5" H × 0.56" D (37 mm × 63.5 mm × 14.2 mm) Receiver 3.3" W × 3.3" H × 1.9" D (84 mm × 84 mm × 48.3 mm)
Operation:	Button Press: long range 433 MHz (active) Presentation: 125 kHz proximity (passive)
Formats:	Wiegand (26-bit industry standard and custom Wiegand formats)
Operating Temperature:	Transmitter -40° F to 122° F (-40° C to +50° C) Receiver -40° C to +65° C (-40° F to +149° F)
Receiver Details:	current draw = 80 mA typical Input voltage = 8 to 24 VDC. IP66/NEMA4 compliant plastic enclosure (Dust & Moisture Resistant)
Weight:	Transmitter 0.7 OZ (20g) Receiver 0.8 OZ (277g)
Secure Transmission:	Rolling code + Encryption algorithm
Read Range¹:	Button Press: Up to 100 feet (30.48m) with TX3-WRR-22 Presentation: Up to 2 inches (51 mm) with transmitters
Warranty:	Limited 1-year warranty against defects in materials and workmanship
Battery:	Transmitter Single replaceable CR2032, 3.3V, lithium battery ² Receiver Single replaceable CR2032, 3.3V, Lithium battery ³
Buttons for transmitters:	TX3-WRT-2H: Two buttons labeled 1 & 2
Compatibility:	Button press: WRR-22 Receivers Presentation: Pyramid readers and others
Material:	Black polycarbonate enclosure with gray ABS keys
Certifications:	FCC, ICC, CE, UL Standard 294 ⁴
LED:	Integrated red LED standard (activated upon button press)
IP Code:	Transmitter IP67 ⁵ Receiver IP65 ⁶
Voltage⁷:	12 VDC nominal
Marking:	Date code and ID
Key Ring:	Optional 1-inch (26 mm) key ring available - key ring is not supplied standard

¹ Tested with WRT-4+.

² Rated to typically provide more than 250,000 button presses under normal conditions.

³ Rated to provide more than 450,000 button presses.

⁴ Carrying the ETL Label and tested by Intertek, conforms to UL Standard 294.

⁵ WRT-2+ was self evaluated.

⁶ Self evaluated.

⁷ Linear power supplies are recommended for best operation.

HID is a registered trademarks of HID Global Corporation, an ASSA ABLOY company. All other trademarks are the property of their respective owners.

Ordering Information

Model	Description
TX3-WRT-2H	2-Button Long-Range Transmitter, only works with the TX3-WRR-22
TX3-WRR-22	Wiegand receiver only works with the TX3-WRT-2H transmitters



Canada

25 Interchange Way Vaughan, ON L4K 5W3
Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property. All other trademarks and registered trademarks are properties of their respective owners.