





## OCAC-304/302 Output Class-A Converter Adder Module

The Model OCAC-304 Output Class A Converter Adder Module is used to convert 4 Class B output circuits in the FA-300 Fire Alarm Panel to 4 Class A output circuits. It mounts under the FA-300 main fire alarm board near the output terminal blocks on the right hand side.

The Model OCAC-302 Output Class A Converter Adder Module is used to convert 2 Class B output circuits in the FA-300 Fire Alarm Panel to 2 Class A output circuits. It mounts under the FA-300 main fire alarm board near the input terminal blocks.

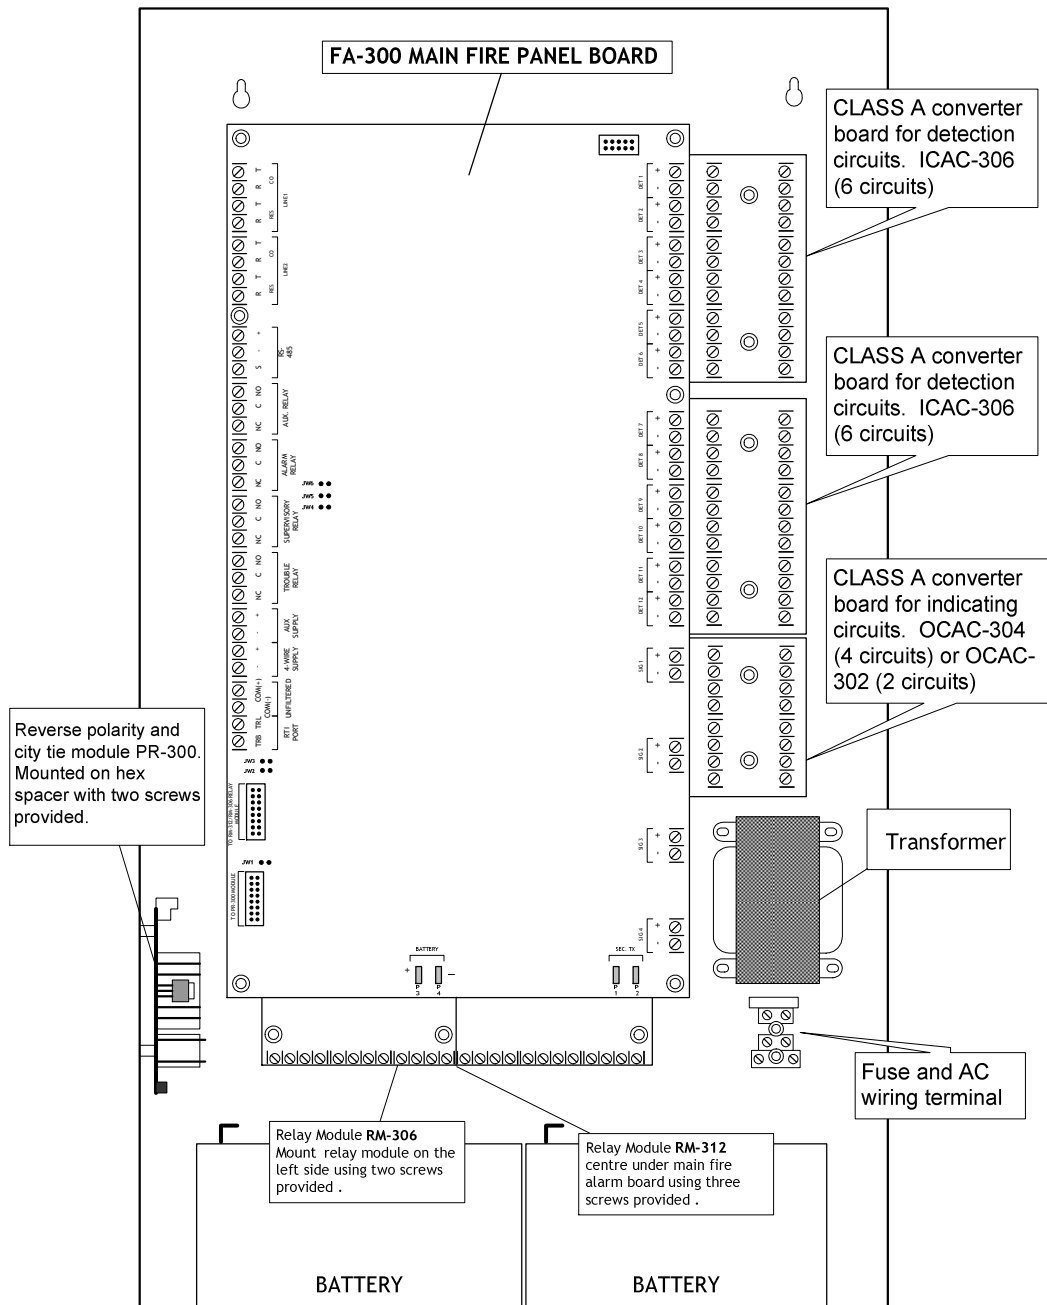

## OCAC-304/302 Output Class A Converter Adder Modules

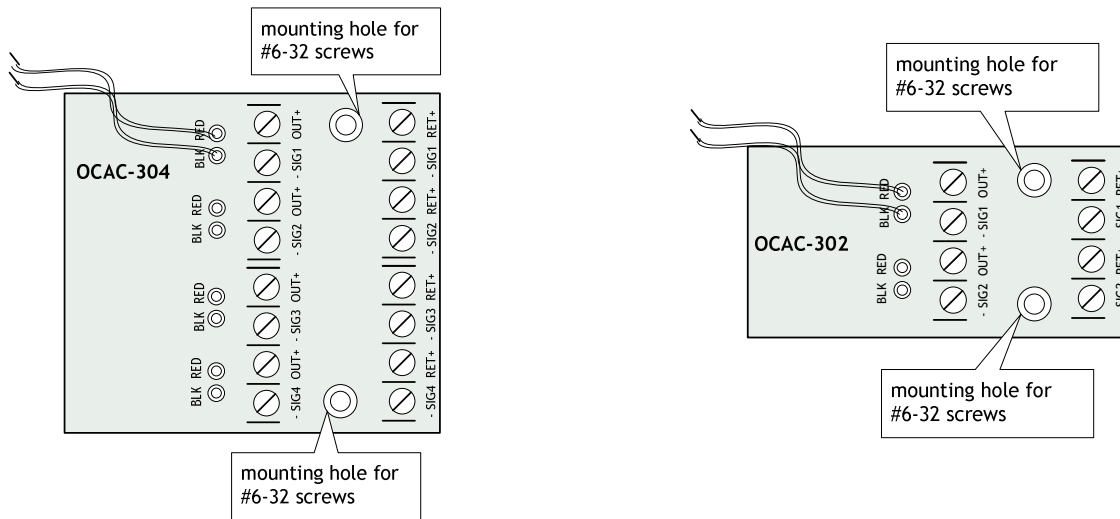

Indicating circuits must be wired from the OCAC-304/302 to the main Fire Alarm board. For example indicating circuit 1 positive (red wire) and negative (black wire) is wired from the Class A converter module to the positive and negative terminals of Indicating circuit 1 on the Main Fire Alarm board.

The actual indicating zone is wired from the SIGNAL OUT positive and negative to the signaling devices and then wired back to the SIGNAL RET positive and negative.

### ELECTRICAL SPECIFICATIONS:

Current Consumption:	Standby:	0 mA
	Alarm:	0 mA