

Replacement Inner Chassis for TX3-TOUCH-S15B-WR and TX3-TOUCH-S15S-WR

A. Shut down the Touch Screen

1. At the Touch Screen terminal, enter 9999.
2. Enter your administrator password, and then press **OK**.
3. Select **File > Shut down > Shut down**.
4. After the TX3 Configurator and Windows have shut down, disconnect power from the MD-990 power supply.
5. Turn off the lobby controller board.

B. Remove the old chassis

1. Disconnect the cables from the terminal block on the chassis.
2. Disconnect the cables for the display, camera, microphone, speakers, and fan.
3. Unscrew the 6 nuts that hold the current chassis in place and remove the chassis.

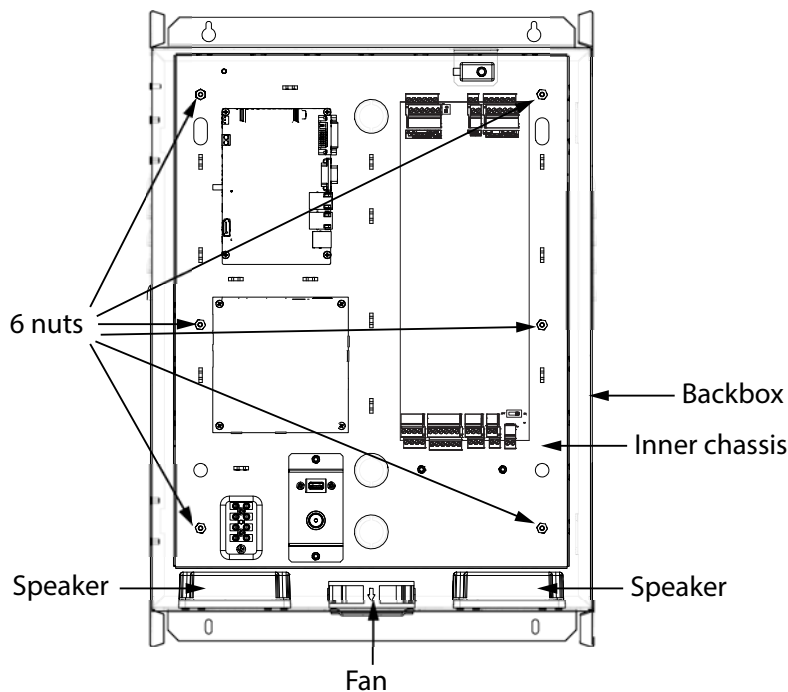


Figure 1 Inner chassis

C. Attach the new chassis

1. Secure the new chassis with the 6 nuts you removed in step B.
2. Connect all the input, output, and networking harnesses to the new chassis.
3. Connect the power cables to the new terminal block.
4. Connect the MD-990 power supply to power.
5. Turn on the lobby controller board.
6. Turn on the Touch Screen.

You are done! If you need more help, call us at 1-888-660-4655.