

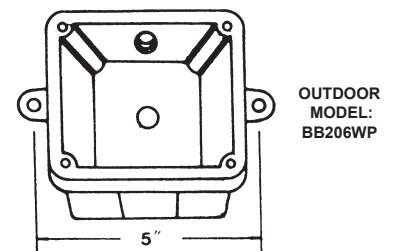
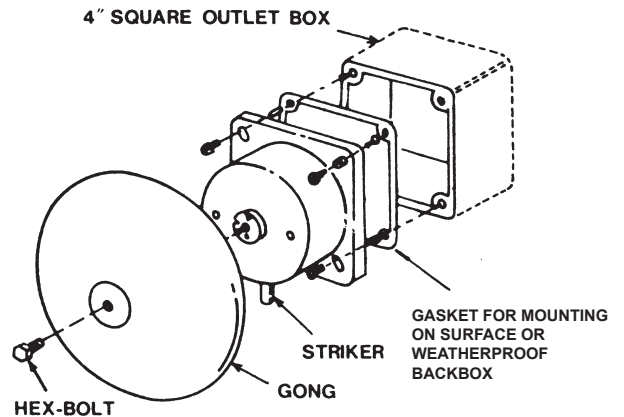



BASIC MECHANISM AND GONGS

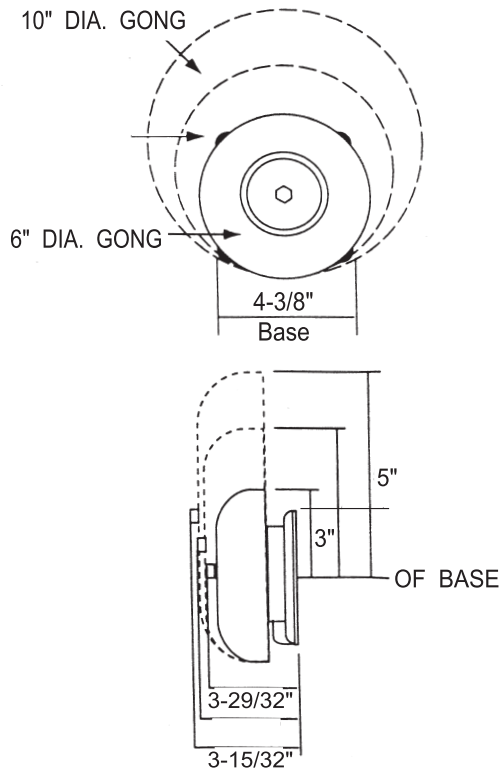

WIRING (REAR VIEW) D.C. BELLS (OBSERVE POLARITY)

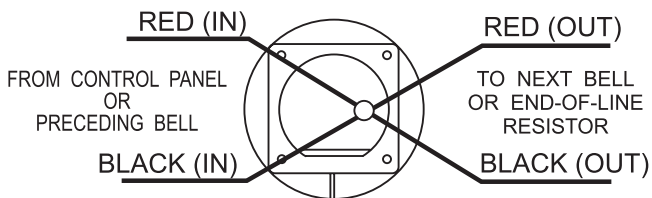

HORIZONTAL AXIS

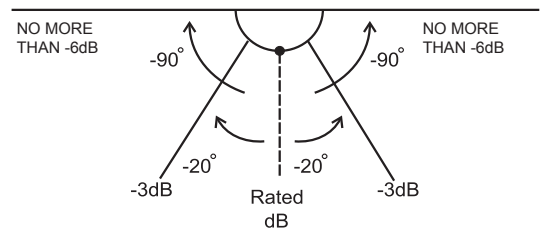

MODEL	DESCRIPTION	VOLTAGE	RATED CURRENT	SOUND LEVEL AT 10 FT dB
BL-6B	6" BELL	24VD	20mA	85
BL-10B	10" BELL	24VDC	20mA	85

INSTALLATION INSTRUCTIONS:

1. REMOVE THE BELL.
2. WIRE THE BELL IN THE CIRCUIT.
3. MOUNT BALL MECHANISM ON 4" SQUARE STANDARD OUTLET BOX WITH THE STRIKER FACING DOWN.
4. REPLACE THE BELL.
5. THE BELL MUST BE MOUNTED A MINIMUM OF 8FT. ABOVE THE FLOOR, OR, AS CLOSE TO THE CEILING AS POSSIBLE.
6. POLARIZED BELL PROVIDES RED(+) AND BLACK(-) LEAD WIRES. WHEN YOU INSTALL THE BELL, POLARITY MUST BE OBSERVED.

CAUTION:

WHEN ELECTRICAL SUPERVISION IS REQUIRED, USE IN AND OUT LEADS AS SHOWN.

PLEASE NOTE:

1. OBSERVE POLARITY.
2. RED WIRES POSITIVE (+).
3. BLACK WIRES NEGATIVE (-).
4. FOR INSTALLATION IN CANADA, INSTALLATION MUST COMPLY TO CANADIAN ELECTRICAL CODE, PART 1, ULC-S524-01, THE STANDARD FOR THE INSTALLATION OF FIRE ALARM SYSTEM, AND ONLY SUBJECT TO FINAL ACCEPTANCE OF LOCAL AHJ.
5. FOR INDOOR USE: MOTOR FIRE BELL ONLY.
6. FOR OUTDOOR USE: MOTOR FIRE ALARM BELL ATTACHED TO WATERPROOF BOX ONLY.
7. A 4" OCTAGON BOX REQUIRES MP-101 MOUNTING PLATE.