


Technical Specifications

Operating Voltage	24V regulated (16 to 33V DC filtered or FWR)
Alarm supply current	Maximum 25mA average
NAC lines current	3A for class A , 2 x 3A for class B lines
First stage and Silence input activation voltage	16 to 33V DC filtered or FWR
First stage and Silence input current	3.5mA max @ 33VDC
Sync link	Internally limited current and voltage
Temperature Range	32°F to 120°F (0°C to 49°C)
Humidity:	10% to 93% Non-condensin
Dimensions	4.625" H x 4.25" W x 1.125" D
Mounting	4" square by 2 1/8" deep box or BB-400 Electrical Box
Wiring range on all terminals	22 to 12 AWG

Interconnection

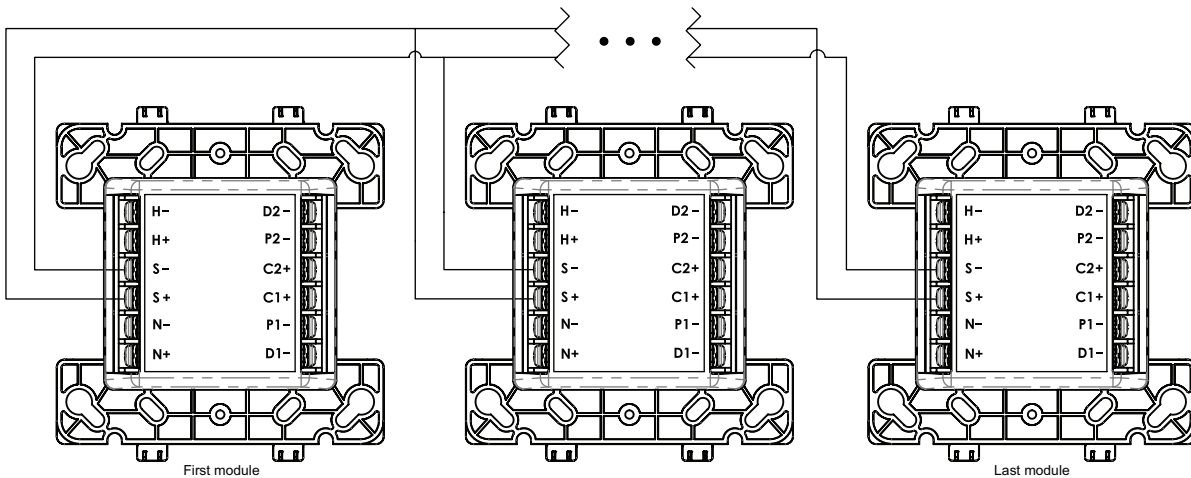

SYNC MODULES INTERCONNECTION (20 MODULES MAXIMUM):

For more details refer to Installation Manual LT-6151

Ordering Information

Model	Description
MIX-4050	Sync Module White Finish
BB-400	Surface mount back box



Canada
 25 Interchange Way
 Vaughan, Ontario L4K 5W3
 Telephone: (905) 660-4655
 Fax: (905) 660-4113

U.S.A.
 4575 Witmer Industrial Estates
 Niagara Falls, NY 14305
 Toll Free: (888) 660-4655
 Fax Toll Free: (888) 660-4113



THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness.