

EL-7006-RC*

Emergency Light Remote Capable





FEATURES	
Power (W)	4 W
Lamp Type	2x2 W LED
Input Voltage	120/347 VAC
Frequency	60 Hz
LED Type	SMD LED
Battery Type	Sealed Lead Acid
Working Time	90 Minutes
Charging Time	15-24 Hours



DESCRIPTION

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall mounting
- Switchable input voltage 120/347VAC with a line cord or AC plug
- 2x2W lamps for emergency mode
- Sealed Lead-acid battery 6V 5Ah
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥ 90 minutes
- Conversion time: < 0.2 second
- IP Class: IP20
- Insulation: II, Range: 80m2
- Operating Temperature: 0 °C ~ 40 °C

TECHNICAL DRAWING

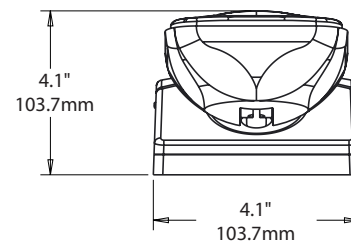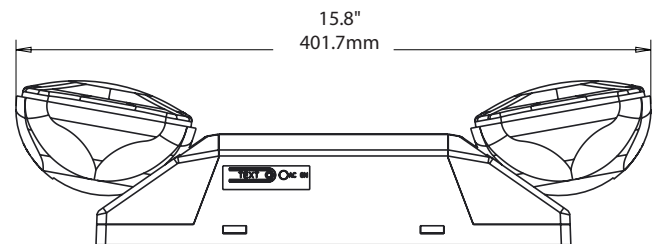

REMOTE ADD-ON SUPPORT



EL-7030A (16pcs)



EL-7030B (8pcs)