


# EL-7027AR\*

## LED Emergency Exit Sign Combo With Adjustable Heads



FEATURES	
Power (W)	3 W
Lamp Type	2x1 W LED
Input Voltage	120/277 VAC
Frequency	60 Hz
LED Type	SMD LED
Battery Type	Ni-cd
Working Time	90 Minutes
Charging Time	15-24 Hours

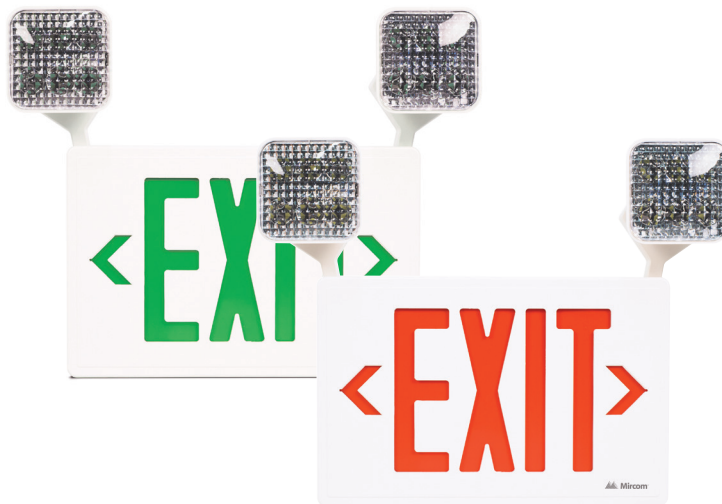

### DESCRIPTION

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Input Voltage: 120/277VAC 60Hz
- 2x1W lamps for emergency mode
- Nickel Cadmium Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥90 minutes
- Conversion time: <0.2 second
- IP Class: IP20
- Insulation: II, Range: 80m2
- Operating Temperature: 0 °C ~ 40 °C

\*Available in:

- Green (EL-7027AG)

### TECHNICAL DRAWING

