


- NOTES:**
1. DESIRED WATTAGE IS SELECTED BY WIRING BETWEEN DESIRED TAP AND TERMINAL C.
  2. FOR PROPER SUPERVISION EACH TERMINAL REQUIRES "IN" AND "OUT" CONNECTION.
  3. SPEAKER RATING MUST BE COMPATIBLE WITH AMPLIFIER OUTPUT VOLTAGE. DO NOT CONNECT A 25V SPEAKER TO A 70V TYPE AMPLIFIER OR VICE VERSA.

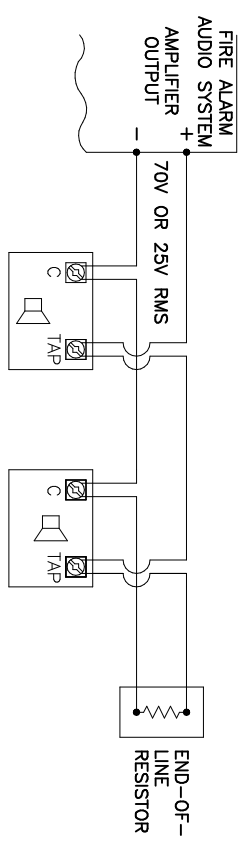

**WIRING DIAGRAM FOR SPS-108-25, SPS-108-70, SPS-208-25 and SPS-208-70**

REV. BY		REMARKS	
<b>MIRCOM TECHNOLOGIES LTD.</b>			
TITLE: SPEAKER WIRING DIAGRAM WITH STROBE LIGHT			
USED ON: FIRE ALARM SPEAKERS		PART NO.: LT-5009	
DRAWN BY: NMT	APPROVED BY: GMR2005		