


Mircom MS-400AD Addressable Manual Stations Installation Sheet

Mircom's MS-400AD Series are single action manual alarm stations. The MS-400AD Manual stations are constructed of durable aluminium and finished in red. An abrasion resistant label with large, raised letters provides clear legible instructions. The model MS-402AD (two stage) is similar to the MS-401AD (single stage) except it contains an additional General Alarm (G.A.) N.O. switch. For safety reasons, the G.A. switch is only accessible after the handle has been pulled. A special key is supplied with each unit. The model MS-405AD is similar to the MS-401AD except it has an additional N.O. switch. The model MS-407AD is similar to the MS-401AD except it has an additional N.C. switch. All manual stations can be easily converted from single action to double action station by the addition of the MS-DA double action lever.

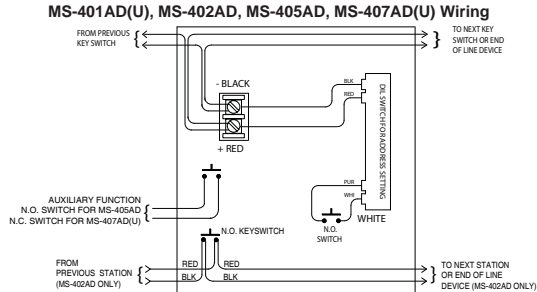

- Notes:**
1. Wire as shown so that supervision of connections is maintained.
 2. Switches shown in the Station Closed position.
 3. Maximum Wire Size: No. 12 AWG.
 4. The suffix "U" denotes USA version.

Specifications

Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC

Mount station to 2" x 4" x 2 1/4" outlet box

Models


- MS-401AD(U):** Intelligent Addressable Single Stage Manual Station
- MS-402AD:** Intelligent Addressable Dual Stage Manual Station
- MS-405AD:** Intelligent Addressable Single Stage Manual Station with additional N.O. Switch
- MS-407AD(U):** Intelligent Addressable Single Stage Manual Station with additional N.C. Switch
- MS-DA:** Double Action Lever Kit (converts any of the above to double action stations)

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-583 Rev.3

Mircom MS-400AD Addressable Manual Stations Installation Sheet

Mircom's MS-400AD Series are single action manual alarm stations. The MS-400AD Manual stations are constructed of durable aluminium and finished in red. An abrasion resistant label with large, raised letters provides clear legible instructions. The model MS-402AD (two stage) is similar to the MS-401AD (single stage) except it contains an additional General Alarm (G.A.) N.O. switch. For safety reasons, the G.A. switch is only accessible after the handle has been pulled. A special key is supplied with each unit. The model MS-405AD is similar to the MS-401AD except it has an additional N.O. switch. The model MS-407AD is similar to the MS-401AD except it has an additional N.C. switch. All manual stations can be easily converted from single action to double action station by the addition of the MS-DA double action lever.

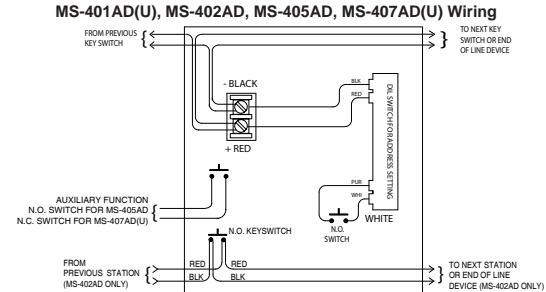

- Notes:**
1. Wire as shown so that supervision of connections is maintained.
 2. Switches shown in the Station Closed position.
 3. Maximum Wire Size: No. 12 AWG.
 4. The suffix "U" denotes USA version.

Specifications

Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC

Mount station to 2" x 4" x 2 1/4" outlet box

Models


- MS-401AD(U):** Intelligent Addressable Single Stage Manual Station
- MS-402AD:** Intelligent Addressable Dual Stage Manual Station
- MS-405AD:** Intelligent Addressable Single Stage Manual Station with additional N.O. Switch
- MS-407AD(U):** Intelligent Addressable Single Stage Manual Station with additional N.C. Switch
- MS-DA:** Double Action Lever Kit (converts any of the above to double action stations)

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-583 Rev.3

Mircom MS-400AD Addressable Manual Stations Installation Sheet

Mircom's MS-400AD Series are single action manual alarm stations. The MS-400AD Manual stations are constructed of durable aluminium and finished in red. An abrasion resistant label with large, raised letters provides clear legible instructions. The model MS-402AD (two stage) is similar to the MS-401AD (single stage) except it contains an additional General Alarm (G.A.) N.O. switch. For safety reasons, the G.A. switch is only accessible after the handle has been pulled. A special key is supplied with each unit. The model MS-405AD is similar to the MS-401AD except it has an additional N.O. switch. The model MS-407AD is similar to the MS-401AD except it has an additional N.C. switch. All manual stations can be easily converted from single action to double action station by the addition of the MS-DA double action lever.

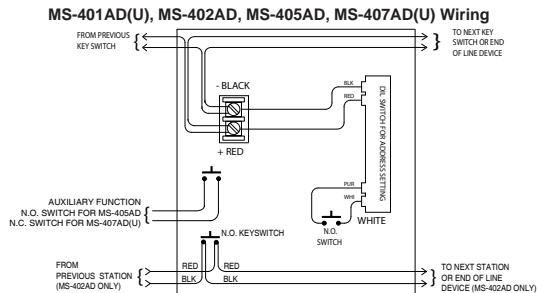

- Notes:**
1. Wire as shown so that supervision of connections is maintained.
 2. Switches shown in the Station Closed position.
 3. Maximum Wire Size: No. 12 AWG.
 4. The suffix "U" denotes USA version.

Specifications

Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC

Mount station to 2" x 4" x 2 1/4" outlet box

Models


- MS-401AD(U):** Intelligent Addressable Single Stage Manual Station
- MS-402AD:** Intelligent Addressable Dual Stage Manual Station
- MS-405AD:** Intelligent Addressable Single Stage Manual Station with additional N.O. Switch
- MS-407AD(U):** Intelligent Addressable Single Stage Manual Station with additional N.C. Switch
- MS-DA:** Double Action Lever Kit (converts any of the above to double action stations)

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-583 Rev.3

Mircom MS-400AD Addressable Manual Stations Installation Sheet

Mircom's MS-400AD Series are single action manual alarm stations. The MS-400AD Manual stations are constructed of durable aluminium and finished in red. An abrasion resistant label with large, raised letters provides clear legible instructions. The model MS-402AD (two stage) is similar to the MS-401AD (single stage) except it contains an additional General Alarm (G.A.) N.O. switch. For safety reasons, the G.A. switch is only accessible after the handle has been pulled. A special key is supplied with each unit. The model MS-405AD is similar to the MS-401AD except it has an additional N.O. switch. The model MS-407AD is similar to the MS-401AD except it has an additional N.C. switch. All manual stations can be easily converted from single action to double action station by the addition of the MS-DA double action lever.

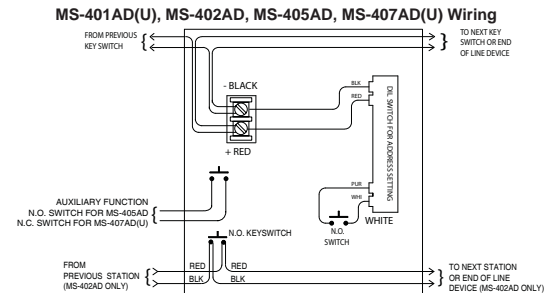

- Notes:**
1. Wire as shown so that supervision of connections is maintained.
 2. Switches shown in the Station Closed position.
 3. Maximum Wire Size: No. 12 AWG.
 4. The suffix "U" denotes USA version.

Specifications

Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC

Mount station to 2" x 4" x 2 1/4" outlet box

Models

- MS-401AD(U):** Intelligent Addressable Single Stage Manual Station
- MS-402AD:** Intelligent Addressable Dual Stage Manual Station
- MS-405AD:** Intelligent Addressable Single Stage Manual Station with additional N.O. Switch
- MS-407AD(U):** Intelligent Addressable Single Stage Manual Station with additional N.C. Switch
- MS-DA:** Double Action Lever Kit (converts any of the above to double action stations)

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-583 Rev.3