

Unique Lockset for TX3-TOUCH-S15B-WR and TX3-TOUCH-S15S-WR

Follow these instructions to install the TX3-TOUCH-WR-LS unique lockset. Each TX3-TOUCH-WR-LS lockset has a unique lock and key. The key opens only the lock that it ships with.

A. Remove the old lock

The lockset consists of 5 parts: lock, gaskets, washer, and nut.

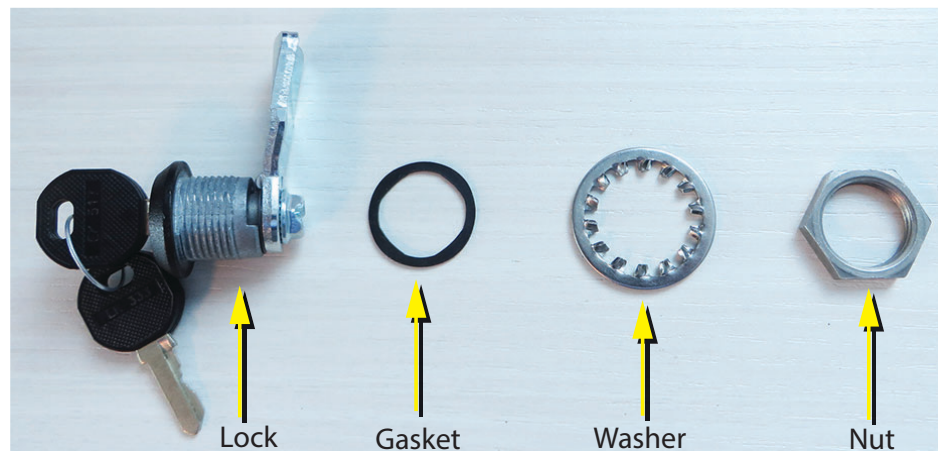


Figure 1 Parts of the lockset

1. Unscrew the old nut and remove the old lock, nut, washer, and gasket.
2. Insert the new lock in the hole in the door and secure with the new washer and nut.

3. Make sure that the gasket is on the outside.

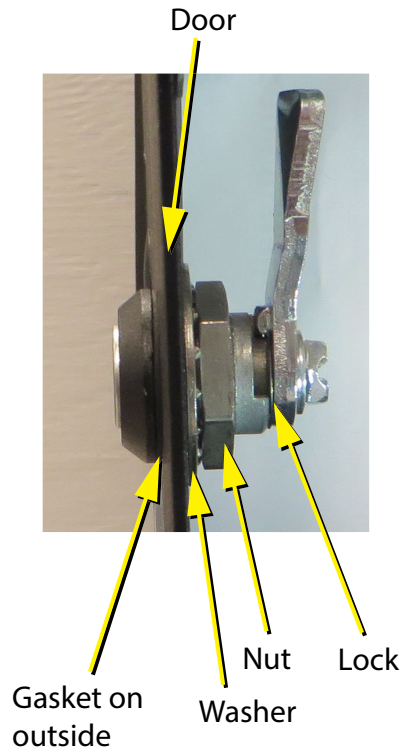


Figure 2 Lockset

4. Close and lock the door.
When the lock is in locked position, the keyhole is horizontal.



Keyhole is horizontal when locked

Figure 3 Keyhole is horizontal when locked

You are done! If you need more help, call us at 1-888-660-4655.