


MINI HORN REMOTE SIGNALING DEVICE

MH-25 R (RED)
MH-25 W (WHITE)

INSTALLATION INSTRUCTIONS

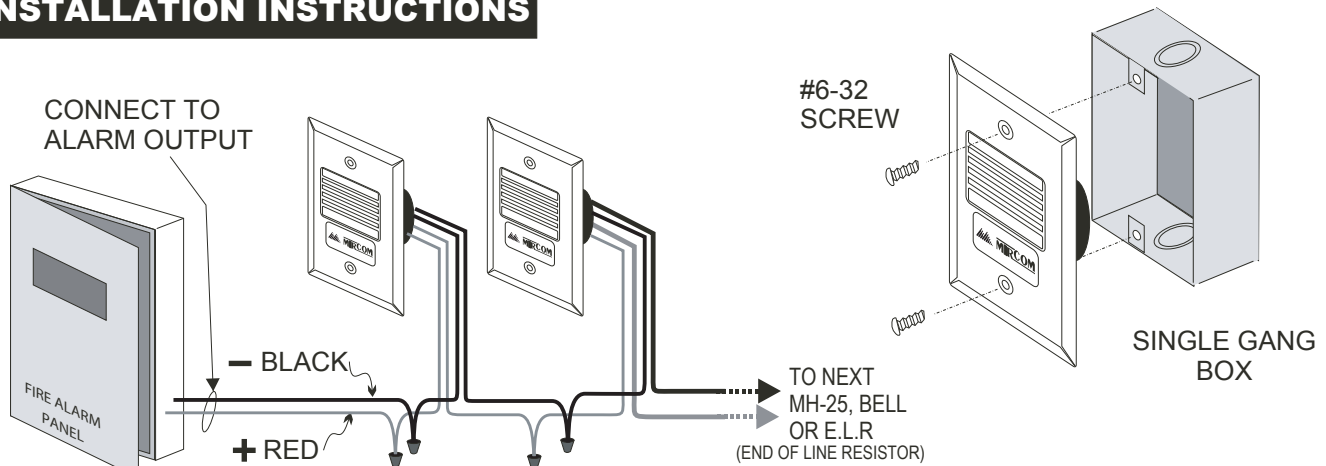

Use both leads for connection.
Break wire run to provide electrical supervision.

SPECIFICATIONS


| | | | |
|--|---------------------------------|------------|--------|
| RATED VOLTAGE | 16-33Vdc Regulated 24Vdc/fwr | | |
| RATED CURRENT | 45 mA | | |
| OVERALL SOUND PRESSURE LEVEL (dBA, anechoic) | TONE | @ 16 V | @ 33 V |
| | Continuous | 81 | 87 |
| | Temporal (via FACP) | 82 | 89 |
| DIRECTIONAL CHARACTERISTIC (represents both horizontal and vertical axes) | ANGLE | OSPL (dBA) | |
| | 0° (on-axis) | 0 (ref) | |
| | -90° & 90° | -3 | |

Sound Level in the indoor installation may vary depending upon the space surroundings
Devices are intended for dwelling use ONLY
Mircom does not recommend any changes to the factory applied finish

Operating temperature: -20°C ~ +60°C (-4°F ~ +140°F)
Plate: A.B.S
Color Selection: Red/White
Weight: 2.2 oz (63g)
Two #6-32 screws provided



DIMENSIONS

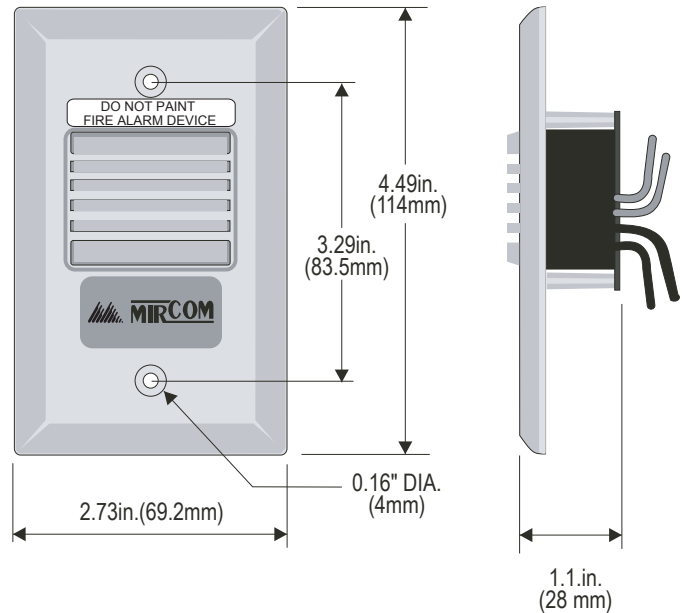

MIRCOM TECHNOLOGIES LTD.
25 INTERCHANGE WAY,
VAUGHAN (TORONTO), ONTARIO L4K 5W3
TEL: (905)660-4655 FAX: (905) 660-4113

U.S. DISTRIBUTION CENTRE
MIRCOM TECHNOLOGIES LTD.
4575 WITMER INDUSTRIAL ESTATES
NIAGARA FALLS, NY 14305
TEL: (888)660-4655 FAX: (888) 660-4113