

SPS-208-25

25V 8" SQUARE SPEAKER

SPS-208-70

70V 8" SQUARE SPEAKER

SPECIFICATIONS


SPEAKER STROBE SIGNALING DEVICES

SPS-108-25

25V 8" ROUND SPEAKER

SPS-108-70

70V 8" ROUND SPEAKER




SPEAKER	INOUT VOLTAGE	POWER TAPS				COIL IMPEDANCE	UL FREQUENCY RANGE	SPEAKER FREQUENCY RANGE	BUFFEL COLOR
		0.5W	1W	2W	4W				
SPS-108-25	25V RMS	85db	88db	89db	90db	8 ohms	400 Hz TO 4000 Hz	320 Hz TO 11000 Hz	OFF WHITE STEEL BUFFLE
SPS-108-70	70V RMS								
SPS-208-25	25V RMS								
SPS-208-70	70V RMS								

dBA at 10 ft. (3m) as measured in reverberant room per UL 1480. Meets or exceeds 85 dBA at 10 ft.(3m) in an anechoic chamber using highest wattage tap per ULC-S541-1999


Current Draw Table for STROBE only:

Average Current (mA) 24 volt models							Peak Current (mA) 24 volt models							In-Rush Current (mA) 24 volt models						
19.2V							19.2V							19.2V						
24V							24V							24V						
26.4V							26.4V							26.4V						
Candela	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR	DC	FWR
15/75	105	132	86	111	79	107	189	225	154	220	140	220	232	260	248	280	256	288		
30/120	144	164	114	132	104	125	213	245	175	235	163	235	236	264	252	350	260	293		


The strobes are listed for indoor use with a temperature operating range of 32°F ~ 120°F (0°C ~ 49°C).

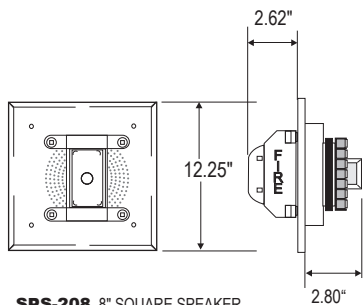


SPS-208 8" SQUARE SPEAKER

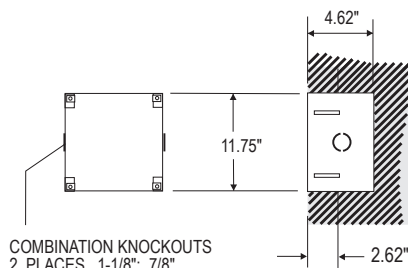


IB-208 FLUSH MOUNTING BACKBOX FOR SPS-208 SPEAKERS

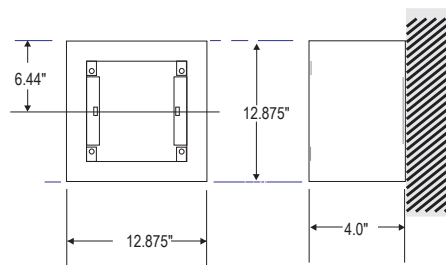


IB-408 SURFACE MOUNTING BACKBOX FOR SPS-208 SPEAKERS

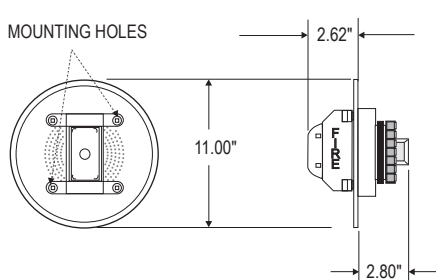


SPS-108 8" ROUND SPEAKER

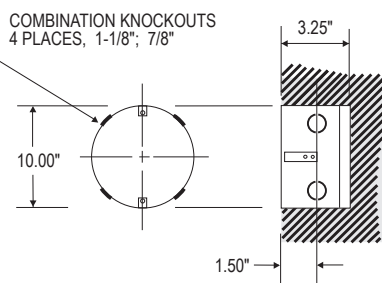

IB-108 FLUSH MOUNTING BACKBOX FOR SPS-108 SPEAKERS

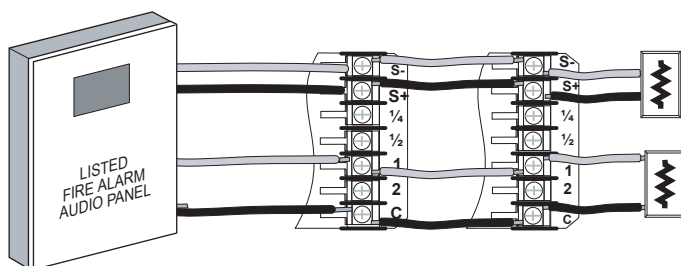

END OF LINE RESISTOR (PLACE ON LAST DEVICE)

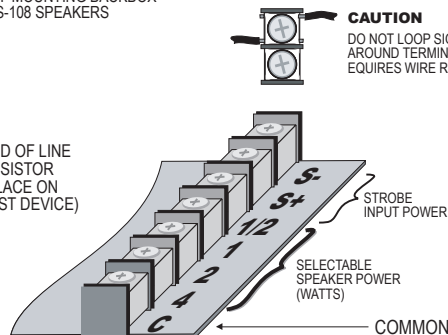

CAUTION
DO NOT LOOP SIGNAL CIRCUIT FIELD WIRES AROUND TERMINALS. ELECTRICAL SUPERVISION REQUIRES WIRE RUN TO BE BROKEN AT EACH END