


Mircom MS-700ID(U) Series Addressable Manual Stations Installation Sheet

Mircom's MS-700ID(U) series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets with a permanently attached addressable module. The addressable manual station has DIL switches which allow for address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

MS-701ID(U), MS-702ID(U), MS-710ID(U), MS-701IDNY & MS-710IDNY

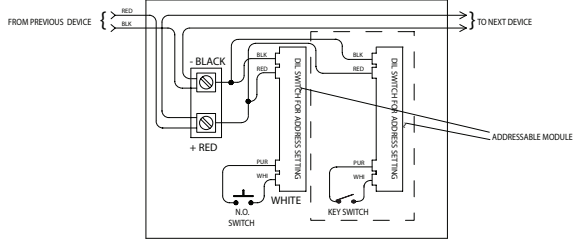

Notes:

1. Area within dashed lines are applicable for MS-702ID only
2. This unit is compatible with Mircom FX-350 series of panels.
3. Wire as shown so that supervision of connections is maintained.
- *4. Mount station to 4" square x 1 1/2" deep outlet box with adaptor plate or to a 4" x 2 1/2" single gang outlet box.

5. Maximum size: No. 12 AWG.
6. Switches shown in the Station Closed position.
7. The suffix (U) denotes USA version.
- * Iberville product number 52151K, 53151K, BC52-C-0.

Models

- MS-701ID(U): Single Stage Single Action
- MS-702ID(U): Two Stage Single Action
- MS-710ID(U): Single Stage Dual Action
- MS-701IDNY: Single Stage Single Action New York Version
- MS-710IDNY: Two Stage Single Action New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL/ULC codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-963 Rev.5
Nov. 2011


Specifications

- Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC
- Manual Station: 4.9" H x 3.5" W x 2.0" D

Mircom MS-700ID(U) Series Addressable Manual Stations Installation Sheet

Mircom's MS-700ID(U) series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets with a permanently attached addressable module. The addressable manual station has DIL switches which allow for address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

MS-701ID(U), MS-702ID(U), MS-710ID(U), MS-701IDNY & MS-710IDNY

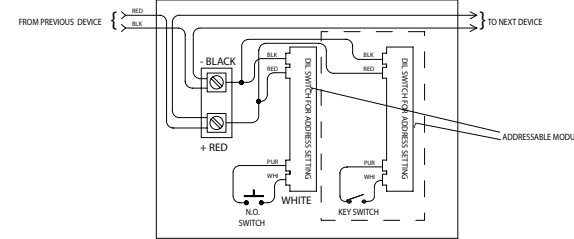

Notes:

1. Area within dashed lines are applicable for MS-702ID only
2. This unit is compatible with Mircom FX-350 series of panels.
3. Wire as shown so that supervision of connections is maintained.
- *4. Mount station to 4" square x 1 1/2" deep outlet box with adaptor plate or to a 4" x 2 1/2" single gang outlet box.

5. Maximum size: No. 12 AWG.
6. Switches shown in the Station Closed position.
7. The suffix (U) denotes USA version.
- * Iberville product number 52151K, 53151K, BC52-C-0.

Models

- MS-701ID(U): Single Stage Single Action
- MS-702ID(U): Two Stage Single Action
- MS-710ID(U): Single Stage Dual Action
- MS-701IDNY: Single Stage Single Action New York Version
- MS-710IDNY: Two Stage Single Action New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL/ULC codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-963 Rev.5
Nov. 2011


Specifications

- Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC
- Manual Station: 4.9" H x 3.5" W x 2.0" D

Mircom MS-700ID(U) Series Addressable Manual Stations Installation Sheet

Mircom's MS-700ID(U) series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets with a permanently attached addressable module. The addressable manual station has DIL switches which allow for address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

MS-701ID(U), MS-702ID(U), MS-710ID(U), MS-701IDNY & MS-710IDNY

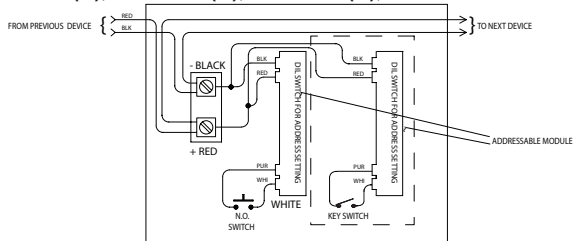

Notes:

1. Area within dashed lines are applicable for MS-702ID only
2. This unit is compatible with Mircom FX-350 series of panels.
3. Wire as shown so that supervision of connections is maintained.
- *4. Mount station to 4" square x 1 1/2" deep outlet box with adaptor plate or to a 4" x 2 1/2" single gang outlet box.

5. Maximum size: No. 12 AWG.
6. Switches shown in the Station Closed position.
7. The suffix (U) denotes USA version.
- * Iberville product number 52151K, 53151K, BC52-C-0.

Models

- MS-701ID(U): Single Stage Single Action
- MS-702ID(U): Two Stage Single Action
- MS-710ID(U): Single Stage Dual Action
- MS-701IDNY: Single Stage Single Action New York Version
- MS-710IDNY: Two Stage Single Action New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL/ULC codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-963 Rev.5
Nov. 2011


Specifications

- Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC
- Manual Station: 4.9" H x 3.5" W x 2.0" D

Mircom MS-700ID(U) Series Addressable Manual Stations Installation Sheet

Mircom's MS-700ID(U) series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets with a permanently attached addressable module. The addressable manual station has DIL switches which allow for address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

MS-701ID(U), MS-702ID(U), MS-710ID(U), MS-701IDNY & MS-710IDNY

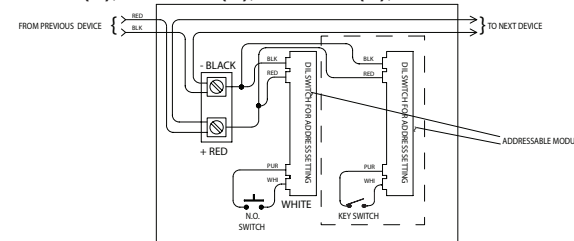

Notes:

1. Area within dashed lines are applicable for MS-702ID only
2. This unit is compatible with Mircom FX-350 series of panels.
3. Wire as shown so that supervision of connections is maintained.
- *4. Mount station to 4" square x 1 1/2" deep outlet box with adaptor plate or to a 4" x 2 1/2" single gang outlet box.

5. Maximum size: No. 12 AWG.
6. Switches shown in the Station Closed position.
7. The suffix (U) denotes USA version.
- * Iberville product number 52151K, 53151K, BC52-C-0.

Models

- MS-701ID(U): Single Stage Single Action
- MS-702ID(U): Two Stage Single Action
- MS-710ID(U): Single Stage Dual Action
- MS-701IDNY: Single Stage Single Action New York Version
- MS-710IDNY: Two Stage Single Action New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL/ULC codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-963 Rev.5
Nov. 2011

Specifications

- Switch Rating: 1 Amp @ 30 VDC
0.1 Amp @ 120VAC
- Manual Station: 4.9" H x 3.5" W x 2.0" D

