
User Manual

2 Wire IP converter VX-IPC

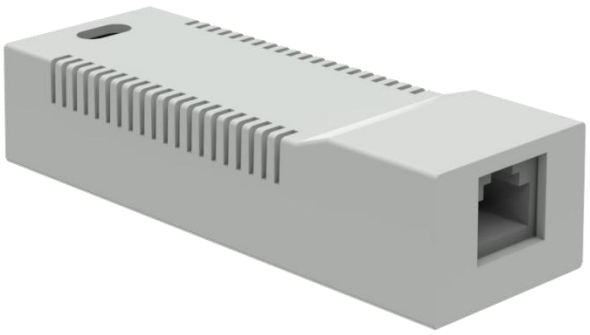

Copyright November 2026

1. Features

- Tool-free installation (no screws required)
- LED status indicator
- Expands system capacity for buildings with up to 128 residences
- Supports integration with IP devices and web-based management
- Compatible with SIP phones, CCTV systems, and NVRs
- Optional web-based management for outdoor panels and indoor monitors
- Ethernet connectivity for installations where Wi-Fi coverage is limited

2. Specification

Category	Specification
Bus Wiring	2 - Wire, no - polarized
Housing Material	Plastic
Color	White
Operating Temperature	-10°C to +40°C (14°F to 104°F)
Dimensions (L x W x H)	92 x 32 x 22mm (3.62 x1.26 x0.87 in)

3. Dip-Switch Setting

0= OFF (switch down)

1= ON (switch up)

Copyright November 2026

DIP Switch 1: PLC mode selection

DIP Switch 2: System reset

DIP Switch	OFF (0)	ON (1)
DIP Switch 1	PLC slave Mode (Default)	PLC master Mode
DIP Switch 2	Normal Operation	Reset Converter

Copyright November 2026