




Features

Power on AC	15W - 28W
Lamp Type	2x10W LED
Input Voltage	120/347VAC
Frequency	50/60Hz
Battery Type	Sealed Lead Acid
Working Time	30 Minutes at 720W
Charging Time	60 Hours

Description

- Durable 18 gauge steel housing
- Wall mountable
- Input Voltage: 120/347VAC, 50/60Hz
- 2 x 10W Super bright LED light heads, 900 lumens each
- Two 12V35Ah sealed lead acid batteries in series (24V)
- Backup time on battery: 30 minutes at 720W
Total calculated wattage at 120 minutes: 220W
Total calculated wattage at 180 minutes: 140W
- Test switch and charge indicator light
- Overcharge & over-discharge protection
- Suitable for damp locations
- Optional 120V line cord included
- Operating temperature: 15 °C ~ 40 °C / 59 °F ~ 104 °F

Technical Drawing

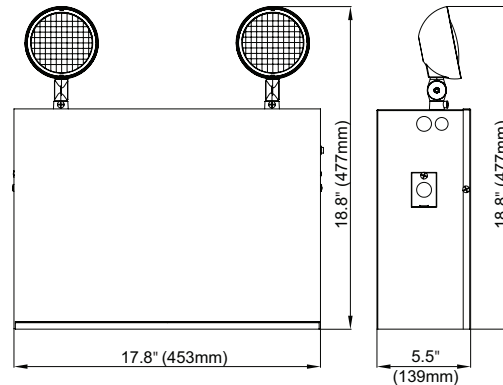

Remote Add-ons

Unit comes with two attached 10W remote light heads. You can add on up to 700W of additional remotes for 30 minutes comprised of any or a combination of the following:



Ordering Information

Model	Description
EL-7066S	Emergency LED Battery Backup Unit - Steel (720W Remote Capable), packed 1/case/30kg



Canada
25 Interchange Way Vaughan, ON L4K 5W3
Telephone: (905) 660-4655 | Fax: (905) 660-4113

U.S.A.
4575 Witmer Industrial Estates Niagara Falls, NY 14305
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



This document is provided by Mircom Technologies Ltd., MGC Systems Corp., or their affiliates, subsidiaries and brands, for convenience or marketing only and does not describe products or services technically. For technical information refer to technical manuals. We do not make representations or warranties regarding this information, including as to completeness or accuracy. We may change these contents at any time and reserve all rights in the contents, including copyrights, trademarks and other intellectual property.